

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representation of
The original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

THIS PAGE BLANK (USPTO)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
1 May 2003 (01.05.2003)


PCT

(10) International Publication Number
WO 03/035495 A1

- (51) International Patent Classification⁷: **B65D 19/26**, [US/US]; 225 Lake Heights Drive, Alpharetta, GA 30022 (US).
19/32
- (21) International Application Number: PCT/US02/33334 (74) Agent: **DIAMOND, Konstantine, J.**; Rehrig Pacific Company, 4010 East 26th Street, Los Angeles, CA 90023 (US).
- (22) International Filing Date: 18 October 2002 (18.10.2002)
- (25) Filing Language: English (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (26) Publication Language: English
- (30) Priority Data: 10/040,099 19 October 2001 (19.10.2001) US (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
- (71) Applicant (*for all designated States except US*): **REHRIG PACIFIC COMPANY** [US/US]; 4010 East 26th Street, Los Angeles, CA 90023 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): **APPS, William, P.**

[Continued on next page]

(54) Title: REINFORCED PALLET

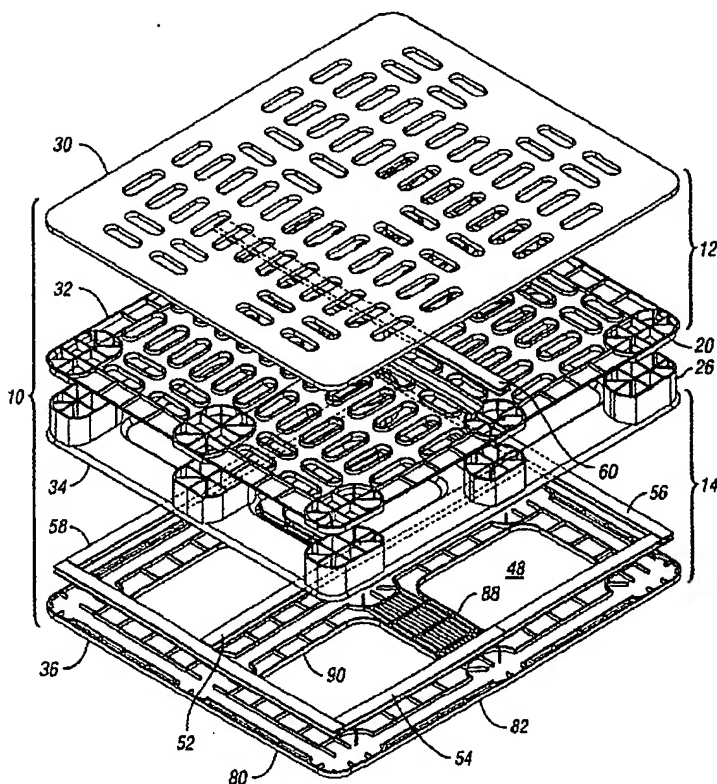

(57) Abstract: A reinforced pallet assembly (10) having a first pallet deck (12) and a second pallet deck (14). Each of the decks has an outer member (32, 36) and an intermediate member (32, 34), each outer member and intermediate member having one of a pair of mating cross-rib surfaces (70, 72, 74, 76) which are mounted together to define box-beam sections within each pallet deck. Also included is an elongate reinforcement member (50) which is disposed between the outer member and the intermediate member of the second pallet deck for providing stiffness thereto. Further included is a plurality of columns (20, 26) which extend between the intermediate members.

WO 03/035495 A1



ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK,
TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

REINFORCED PALLET

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to a reinforced pallet.

5 2. Background Art

Pallets are subject to many types of loads and forces. Many of these loads and forces are illustrated by pallet racking scenarios and line load scenarios. The line load is the weight of a unit load concentrated along a narrow area across the full length or width of the pallet. The rack load is the load carrying capacity and
10 deflection of a pallet which is supported by a rack frame near the ends of the pallet stringers.

Today, the use of plastic pallets is becoming more common. While reinforced plastic pallets presently exist, most do not provide sufficient reinforcement for racking loads and line loads. For example, a non-continuous,
15 multiple piece cross-reinforcement may do little to support racking loads.

Some reinforced pallets today may attempt to handle various load types, such as line loads and racking loads, but are ultimately not size efficient or cost efficient. In other words, these pallets may not provide the end user with the desired strength and load bearing properties for the desired pallet package height. For example, in
20 certain reinforced plastic pallets, the deck in which the reinforcement is located may be significantly larger than its unreinforced counterparts. In such a reinforced deck, the reinforcements may overlap in different planes, resulting in a larger deck height, and an overall larger pallet height.

Moreover, many reinforced pallets have reinforcement which is exposed.
25 This is a particularly undesirable feature in the case where the reinforcement is made

from fiberglass or other fiber material, which may eventually delaminate and cause the pallet to have less durability and a shorter pallet life.

Pallets formed of molded plastic material have distinct advantages over those made of wood or metal. While wood pallets have sufficient stiffness, they are heavy; are subject to warpage, splintering and splitting; are nonuniform in strength; and gain significant weight when wet. Metallic pallets typically are expensive and, in the case of steel, heavy and subject to corrosion. Plastic pallets are stronger, lighter and more durable than wooden pallets. Traditionally, fire retardance as it relates to plastic pallets has not been recognized as an issue. However, recently, plastic pallets have been the subject of standards promulgated by the National Fire Protection Association (NFPA), Underwriters Laboratories Inc. (UL), Factory Mutual Research Company (FMRC), and National Association of Fire Marshals.

Some standards allow for plastic pallets to be used the same as wood pallets when experimental data show equivalency in the burning and suppression characteristics between the plastic and wood pallets. Unfortunately, some material presently used to help promote fire retardance in plastic pallets, such as an engineered resin blend of high-impact polystyrene and polyphenylene oxide, is very expensive and thus not cost efficient to mold an entire pallet from this material. Such material may also not be as injection-molding friendly as other polymeric materials.

Accordingly, a reinforced plastic pallet is desired which is capable of handling the various loads to which a pallet may be subjected, including both line loads and racking loads. The pallets should have a package height comparable to an unreinforced pallet. The pallet and reinforcement should also be durable, provide for improved pallet life, and should be cost efficient. Moreover, a pallet is desired which is accepted by the fire community as having burn and suppression properties substantially similar or better than wood, is relatively inexpensive, lightweight, and easy to manufacture.

SUMMARY OF THE INVENTION

It is an object according to the present invention to provide a plastic pallet which is capable of accommodating both line loading and rack loading.

5 It is another object according to the present invention to provide a plastic pallet with reinforcement for providing improved strength and load supporting properties.

It is another object according to the present invention to provide a reinforced pallet which has is size efficient or which has a package height comparable to other plastic pallets.

10 It is yet another object according to the present invention to provide a reinforced pallet with improved durability and cost efficiency.

In carrying out the above objects according to the present invention, provided is a reinforced pallet assembly having a first pallet deck and a second pallet deck. Each of the decks has an outer member and an intermediate member, each outer
15 member and intermediate member having a one of a pair of mating cross-rib surfaces which are mounted together to define box-beam sections within each pallet deck. Also included is a reinforcement member which is disposed between the outer member and the intermediate member of the second pallet deck for providing stiffness thereto. Further included is a plurality of columns which extend between
20 the intermediate members. The first and second pallet decks and columns may a plastic material and the at least one reinforcement member may comprise a metal material. Also, the columns include a first column portion projecting from the first intermediate portion, and a second column portion projecting from the second intermediate portion and attached to the first column portion. The second pallet
25 deck may be defined by a unitary construction comprising a plurality of peripheral rail members and at least one cross-rail extending between a pair of peripheral rail members. The reinforcement member may be disposed within the cross-rail or within the peripheral rail members of the second pallet deck. The second pallet deck includes a channel within which the reinforcement member is disposed.

The first pallet deck further may include a second reinforcement member disposed between the first outer member and the first intermediate member which is oriented generally perpendicular to the reinforcement member. The first pallet deck may include a second reinforcement member disposed therein extending
5 substantially along its central axis.

Also provided according to the present invention is a pallet assembly which has a first pallet member having a first pallet surface including a first set of cross-rib members. A second pallet member is disposed adjacent the first pallet member and has a second pallet surface including a second set of cross-rib members
10 corresponding to the first set. The first and second sets of cross-rib members are secured together to form a first pallet deck. The second pallet member also includes a mating surface opposite the second pallet surface. Also included is a first reinforcement member which is disposed between the first and second pallet members along a first axis thereof. A third pallet member is disposed adjacent the
15 second pallet member and has a third pallet surface including a third set of cross-rib members. The third pallet member has an other mating surface opposite the third pallet surface. A fourth pallet member is disposed adjacent the third pallet member and has a fourth pallet surface including a fourth set of cross-rib members corresponding to the third set. The third and fourth sets are secured together to form
20 a second pallet deck. A second reinforcement member is disposed between the third and fourth pallet members along a second axis thereof oriented substantially perpendicular to the first reinforcement member. A column portion extends between the third and fourth members.

Also provided according to this invention is a reinforced pallet having a top
25 deck and a bottom deck and columns. The top deck has an upper surface, a lower surface, and a plurality of upper box beam sections between the upper and lower surfaces. The bottom deck has an upper surface, a lower surface, and a plurality of lower box beam sections between the upper and surfaces. The bottom deck further includes at least one elongate reinforcement member disposed therein, and a
30 plurality of columns extending between and attached to the top deck and bottom deck.

The above objects and other objects, features, and advantages of the present invention are readily apparent from the following detailed description of the best mode for carrying out the invention when taken in connection with the accompanying drawings.

5

BRIEF DESCRIPTION OF THE DRAWINGS

FIGURE 1 is a perspective view of a first embodiment of a reinforced pallet according to the present invention;

FIGURE 2 is a top plan view of the first embodiment;

FIGURE 3 is a bottom plan view of the first embodiment;

10

FIGURE 4 is a front elevational view of the first embodiment, the rear elevational view being substantially a mirror image thereof;

FIGURE 5 is a left side elevational view of the first embodiment, the right side elevational view being substantially a mirror image thereof;

FIGURE 6 is a cross-sectional view taken along line 6-6 of Figure 2;

15

FIGURE 7 is a cross-sectional view taken along line 7-7 of Figure 2;

FIGURE 8 is a quarter section of the first embodiment;

FIGURE 9 is a cross-sectional view taken along line 9-9 of Figure 8;

FIGURE 9a is an exploded view of Figure 9;

FIGURE 10 is a cross-sectional view taken along line 10-10 of Figure 8;

20

FIGURE 10a is an exploded view of Figure 10;

FIGURE 11 is an exploded perspective view of Figure 1, illustrating the reinforcement therein;

FIGURE 12 is a perspective view of a second embodiment of a reinforced pallet according to the present invention;

5 FIGURE 13 is a top plan view of the second embodiment;

FIGURE 14 is a bottom plan view of the second embodiment;

FIGURE 15 is a front elevational view of the second embodiment, the rear elevational view being substantially a mirror image thereof;

10 FIGURE 16 is a left side elevational view of the second embodiment, the right side elevational view being substantially a mirror image thereof;

FIGURE 17 is a cross-sectional view taken along line 17-17 of Figure 2;

FIGURE 18 is a cross-sectional view taken along line 18-18 of Figure 2;

FIGURE 19 is a quarter section of the second embodiment;

FIGURE 20 is a cross-sectional view taken along line 20-20 of Figure 19;

15 FIGURE 20a is an exploded view of Figure 20;

FIGURE 21 is a cross-sectional view taken along line 21-21 of Figure 19;

FIGURE 21a is an exploded view of Figure 21;

FIGURE 22 is an exploded perspective view of Figure 12, illustrating the reinforcement therein;

FIGURE 23 is a perspective view of a third embodiment of a reinforced pallet according to the present invention;

FIGURE 24 is a top plan view of the third embodiment;

FIGURE 25 is a bottom plan view of the third embodiment;

5 FIGURE 26 is a front elevational view of the third embodiment, the rear elevational view being substantially a mirror image thereof;

FIGURE 27 is a left side elevational view of the third embodiment, the right side elevational view being substantially a mirror image thereof;

FIGURE 28 is a cross-sectional view taken along line 28-28 of Figure 24;

10 FIGURE 29 is a cross-sectional view taken along line 29-29 of Figure 24;

FIGURE 30 is a quarter section of the third embodiment;

FIGURE 31 is a cross-sectional view taken along line 31-31 of Figure 30;

FIGURE 31a is an exploded view of Figure 31;

FIGURE 32 is a cross-sectional view taken along line 32-32 of Figure 30;

15 FIGURE 32a is an exploded view of Figure 32;

FIGURE 33 is an exploded perspective view of Figure 1, illustrating the reinforcement therein;

FIGURE 34 is a perspective view of a fourth embodiment of a reinforced pallet according to the present invention;

20 FIGURE 35 is a top plan view of the fourth embodiment;

FIGURE 36 is a bottom plan view of the fourth embodiment;

FIGURE 37 is a front elevational view of the fourth embodiment, the rear elevational view being substantially a mirror image thereof;

FIGURE 38 is a left side elevational view of the fourth embodiment, the
5 right side elevational view being substantially a mirror image thereof;

FIGURE 39 is a cross-sectional view taken along line 39-39 of Figure 35;

FIGURE 40 is a cross-sectional view taken along line 40-40 of Figure 35;

FIGURE 41 is a quarter section of the fourth embodiment;

FIGURE 42 is a cross-sectional view taken along line 42-42 of Figure 41;

10 FIGURE 42a is an exploded view of Figure 42;

FIGURE 43 is a cross-sectional view taken along line 43-43 of Figure 41;

FIGURE 43a is an exploded view of Figure 43;

FIGURE 44 is an exploded perspective view of Figure 1, illustrating the reinforcement therein;

15 FIGURE 45 is a perspective view of a fifth embodiment of a pallet according to the present invention;

FIGURE 46 is an exploded perspective view of the fifth embodiment;

FIGURES 46a, b and c, are alternate exploded views of the fifth embodiment; and

FIGURE 47 is an exploded cross-sectional view of an alternate fifth embodiment.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT(S)

Figures 1-11 illustrate a reinforced pallet 10 according to a first embodiment of to the present invention. Pallet 10 includes a top (or upper) deck 12 and a bottom (or lower) deck 14. Top deck 12 and bottom deck 14 are formed having a box beam construction as illustrated in Figures 9a and 10a, and decks 12,14 are attached to each other to define pallet 10. More particularly, bottom deck 14 of pallet 10 has at least one reinforcement cross-member 50 disposed therein. As disclosed further herein, bottom deck 14 may also include peripheral reinforcement members. However, in accordance with the teachings of the present invention, the at least one reinforcement cross-member 50 is preferably not disposed around the periphery of bottom deck 14, but instead is distal from the periphery, and more preferably extends across and within the at least one of the longitudinal or transverse centerlines of bottom deck 14.

As best illustrated in Figures 9a and 10a, top deck 12 has a generally flat, planar upper surface 16 and in this embodiment also includes a lower surface 18 which is defined by a plurality of first column portions 20 (supports) which are shown as being integrally formed with top deck 12 in a unitary manner. Lower deck 14 includes a generally planar lower surface 22 and in this embodiment also includes an upper surface 24 defined by a plurality of second column portions 26 (supports) which are also shown as being integrally formed with bottom deck 14 in a unitary manner. Mating surfaces 18 and 24 mate with and attach to each other. More particularly, mating column portions 20, 26 are mounted to each other to complete a plurality of columns 28 (or blocks) extending between top deck 12 and bottom deck 14, of which there are generally nine columns: four columns at the corners, four columns being centrally located along the sides, and one column centrally located. Of course, as shown in later embodiments, the columns may be separate components or may be integrally molded to form a unitary construction with one of the decks.

Figure 1 illustrates a perspective view of pallet 10, which includes top and bottom deck portions 12,14 which are preferably, but not necessarily, formed of a thermoplastic or other polymeric material via an injection molding process, and more particularly formed of a polypropylene material. Pallet 10 is shown as having a generally rectangular shape and also as being generally symmetrical about each center line. However, it is fully contemplated that pallet 10 and various shapes and configurations, and may also not be symmetrical about the centerline, without departing from the teachings according to the present invention. Figures 2, 3, 4 and 5 illustrate respectively a top plan view, bottom plan view, front elevational view and side elevational view of pallet 10. Figure 7 is a partial cross-sectional view of pallet assembly 10 taken along line 7-7 of Figure 6. Figure 8 is a cross sectional view of the pallet assembly taken along line 8-8 of Figure 6.

With reference to Figures 9a, 10a, and 11, top deck 12 includes a first (top) portion 30 and a second (intermediate top or mid-top portion) portion 32, each having first mating surfaces 40, 42 which are securely attached to each other by any of various methods known in the art, such as plastic welding, i.e. hot plate welding, sonic welding, or infrared radiation. Bottom deck 14 includes a third (intermediate bottom or mid-bottom portion) portion 34 and a fourth (bottom) portion 36 which have corresponding second mating surfaces 44,46 which are securely attached to each other in a manner similar to top deck 12. The first mating surfaces 40, 42 are defined by a plurality of corresponding flange or ribbed members 70, 72. Second mating surfaces 44,46 are defined by a plurality of corresponding flange or ribbed members 74, 76, which are generally oriented in a multi-directional cross-ribbing orientation. With reference to Figures 1, 3 and 11, bottom deck 14 includes one or more relatively large openings 48 defined by a plurality of peripheral rail members 80, 82, 84, 86, as well as cross-rail members 88,90.

As best shown in Figure 11, the bottom deck 14 also includes at least one cross-reinforcement member 50 which extends continuously across one of the longitudinal or transverse axes of bottom deck 14. For ease of reference, the axis along which cross reinforcement member 50 is disposed in bottom deck 14 will be referred to as the longitudinal axis.

Bottom deck 14 also preferably, but not necessarily, includes a plurality of peripheral elongate reinforcement members 52, 54, 56, 58 extending along the peripheral rails of bottom deck 14 for enhancing the strength, torsion, bending, and stiffness properties of pallet 10. Reinforcement members 30-38 of bottom deck 14 are particularly directed to providing reinforcement in the rack load and line load scenarios to which pallet 10 may be subjected. They are shown disposed in a generally planar orientation between mid-bottom member 34 and bottom member 36, such that the insert is sandwiched between adjacent mating surfaces 44 and 46, respectively. For example, as illustrated in Figure 11, reinforcement members 52-58 are positioned within and extend along peripheral rails 80, 82, 84, 86.

Bottom member 36 has a pattern defined by ribs and cross-ribs, the pattern defining a corresponding recess or channel 78 into which reinforcement members 50-58 are received, such that when positioned, the reinforcement member(s) has a height similar to that of the surrounding ribbed structure, and the rib structure and the insert member are co-planar with surface 46. Accordingly, the reinforcements in bottom deck 14 do not increase the package height of this deck.

As illustrated in Figures 6, 9-9a, 10-10a, and 11, pallet 10 further includes a second cross-reinforcement 60 which is disposed within top deck 12, between first member 30 and second member 32. More particularly, second cross-reinforcement 60 is disposed along the transverse axis of top deck 12, which is in a plane parallel to but lies perpendicular to bottom deck cross-reinforcement 50. By including second cross-reinforcement member 60 within top deck 12 instead of bottom deck 14, many issues are addressed. First, in conjunction with bottom deck 14, this design provides pallet 10 with the desired rack loading strength. Second, both cross reinforcement members 50 and 60 are shown as continuous beams, which provides pallet 10 with the desired rack loading strength, while the line strength is enhanced by the peripheral reinforcement members. Moreover, by providing each cross-reinforcement member 50 and 60 in separate decks 12, 14, respectively, the desired package height of pallet 10 is able to be maintained, as opposed to a pallet which may have cross-reinforcement members on different vertical planes within a single deck. Accordingly, the design according to pallet 10 provides improved strength and packaging characteristics.

Accordingly, top deck reinforcement member 60 is disposed in the cross-member of top deck 12 which is oriented in a plane parallel to but along an axis perpendicular to the reinforced cross-member 50 of bottom deck 14. This orientation of reinforcement members in separate decks is more cost efficient than
5 other embodiments, and will also satisfy the desired strength, line and rack loading strength, and bending characteristics.

Reinforcement members 50-58 may be formed of metal, such as stamped steel, aluminum, or may also be formed of a composite or structural plastic, such as a carbon-filled or glass-filled composite, or pultrusion. Of course, it is contemplated
10 that there are numerous other materials which may provide the desired strength and loading properties and characteristics of pallet 10.

After reinforcement members are positioned on the desired rails, bottom and mid-bottom members 36, 38 are securely attached to each other. If attached by a welding process, mating ribbed surfaces 41, 43 of members 36,38 are heated to a
15 point of plasticizing the plastic surfaces, and then are introduced to each other and held together for a period of time by which a welded bond will form between the surfaces. In those areas, the attachment of intermediate bottom member 34 to bottom member 36 (i.e. welding, etc.) takes place between the mating ribs of those areas not covered by reinforcement member 50 as well as the mating flanged edges
20 of members 34,36. Deck portions 32, 34 of top deck 12 are similarly attached.

Figures 9-10 show a partial cross-sectional view of a quarter of pallet 10 having reinforcement members 50-60 which have an I-beam cross-section. Of course, it is fully contemplated that the reinforcement members are not limited to
25 that cross-section shown. Instead, the cross-section of reinforcement members is illustrated by way of example and not limitation, and it is fully contemplated that the reinforcement members 50-60 disclosed herein may have any number of cross-sectional designs and configurations, the selection of which may be chosen based on the desired application, cost, availability, and properties of pallet 10 in
30 accordance with the teachings herein. For example, the fourth embodiment disclosed herein in association with Figures 33-44 includes reinforcement members having an inverted U-shaped cross-section.

Figures 9 and 10 illustrate that joining together each of the above respective pairs of mating ribs and a pattern of cross-ribbing (both continuous and non-continuous across the pallet decks) which are aligned to define a plurality of box-beam sections 92 across one or both of pallet decks 12, 14, and particularly in those areas which do not include reinforcement members. Mating planar surfaces 18, 24 of decks 12, 14 which form columns 28 between the decks may also define box beam sections. The box-beam sections may be interrupted by flow-through holes 13 or handles 15 without departing from the teachings herein. It is also noted that the reinforcement members herein are preferably fully enclosed within their respective decks 12, 14, with little or no exposure to the environment. Pallet 10 thus provides improved racking and line loading strength, as well as overall deflection, bending, and stability characteristics.

SECOND EMBODIMENT

Figures 12-22 illustrate a pallet 110 according to a second embodiment of the present invention. Components similar to those of the first embodiment have a corresponding reference number with a "1" prefix. Pallet 110 is similar to pallet 10, but has a bottom deck 114 with a single cross-rail 188 having therein a first continuous cross-reinforcement member 150. Because the single cross-rail bottom deck design may have relatively lower bending and torsional strength compared to the first embodiment, additional top deck 112 reinforcement may be necessary. Accordingly, pallet 110 includes a pair of continuous cross-reinforcement members 160, 161 which lie in the transverse axis of top deck 112, as well as a pair of opposed peripheral reinforcement members 162, 164 proximate sides of top deck 112. Again, because pallet 110 includes one or more reinforcement members in top deck 112, the strength of pallet 110 is increased without increasing the thickness of the resulting pallet.

THIRD EMBODIMENT

A third embodiment of according to the present invention is illustrated in Figures 23-33 as pallet 210, which includes top deck 212 and bottom deck 214. Components similar to those of the first embodiment have a corresponding reference number with a "2" prefix. Pallet 210 includes a plurality of peripheral reinforcement members 252, 254, 256, 258, and an integral formed cross-member 266 formed as

unitary member with co-planar first and second cross-reinforcements 250 and 251. This unitary, continuous reinforcement 266 across bottom deck has sufficient strength characteristics such that no reinforcement may be necessary in top deck 212. While reinforcement could be added to top deck 212, this would increase the
5 cost and weight of pallet 210.

In accordance with the teachings according to the present invention, such unitary cross-member 266 is preferable to a multi-piece, non-continuous, co-planar cross reinforcements within a single deck, and also to reinforcement members on parallel planes within a single deck, both of which may not provide the desired
10 racking load strength and/or package height.

Adding a separate reinforcement cross-portion across the remaining reinforcement cross member would require at least a portion (in the central region where they cross) of the reinforcement members to lie in separate planes. Thus, a
15 center reinforcement which crosses may not be feasible.

FOURTH EMBODIMENT

A fourth embodiment according to the present invention is shown in Figures 33-44 as pallet 310. Components similar to those of the first embodiment have a corresponding reference number with a "3" prefix. In this embodiment, note that
20 bottom deck 314 includes an integrally formed, unitary reinforcement member 368, including cross-member portions 350, 351, as well as peripheral reinforcements 352, 354, 356, 358, which are generally continuous, and also generally has an inverted U-shaped cross-section. As with the third embodiment, the overall continuous nature of reinforcement member 368 within bottom deck 314 provides pallet 310
25 with the desired strength, as well as the desired line load and rack loading strength, and torsional strength. However, member 368 may be relatively more costly to manufacture.

FIFTH EMBODIMENT

A pallet assembly according to the present invention is illustrated in Figs. 46-47 as pallet assembly 410. Pallet assembly 410 includes the following: a top deck
30 412 having a top portion 430 and a mid-top portion 432; a bottom deck 414 having

a mid-bottom portion 434 and a bottom portion 436; and a plurality of column members 428.

While pallet assembly 410 may be used in the same environments as other pallets disclosed herein, it is particularly well-suited to a pallet assembly which
5 seeks to enhance the properties of its individual components, and doing so in a cost efficient manner when feasible. For example, due to their positioning within pallet 410, column members 428 are subject to repeated impact by fork lift tines. Thus, in a preferred embodiment, columns 428 may be molded from a plastic material or composite that provides high impact resistance. Upper and lower decks 412, 414
10 on the other hand may not require a high impact resistant material, but instead may be formed of a material that has relatively high friction coefficient, high stiffness, high fire retardant characteristics (one which improves the burning and suppression characteristics) properties of the pallet.

With regard to the burn and suppression characteristics of a pallet, the
15 present invention teaches that the horizontal surfaces of a pallet (i.e. the decks), and particularly the underside of the decks, have a greater exposure to flame during burn as flames are traveling upwards, and thus have a relatively greater influence on the pallet burn rate than the vertical surfaces of a pallet (i.e. the columns). Accordingly, for a pallet seeking to incorporate fire retardant material into its design in an
20 effective and cost efficient manner, it is unexpectedly taught herein that the entire pallet does not need to be formed of fire retardant material, but instead selected components may be formed thereof. One embodiment according to the present invention teaches that the horizontal portions of the pallet have a predetermined level of fire retardance, while the vertical portions have minimal or no fire
25 retardance, and in any event less than the horizontal portions. Thus, in keeping with these teachings, the decks 412, 414 (the horizontal surfaces) of pallet 410 are formed of a polymeric material having fire retardant properties, typically by including a fire retardant resin or additive to a plastic carrier, thereby defining a predetermined level of fire retardance. On the other hand, the columns 428 (the
30 vertical surfaces) may be formed separately from a high impact material or other type of polymer material which also has little or no flame retardance, and thus has a predetermined level of flame retardant which is less than decks 412, 414.

More particularly, for one deck pallets and two deck pallets, the present invention further teaches that the upper horizontal portion of a pallet (i.e. the top deck components) has the greatest affect on the burn rate of a pallet than the other portions of the pallet. Accordingly, in keeping with the teachings according to the present invention, top deck 412 of pallet 410 is formed of a plastic material having a predetermined level of flame retardance, while the columns 428 and lower horizontal surfaces (the bottom deck 414) may be formed separately from a high impact material or other type of polymer material which has little or no flame retardant material, and in any event has less than top deck 412. In such an embodiment, the columns may be integrally formed with the bottom deck of the same material (Figure 47).

In a pallet having multiple deck portions, the present invention further teaches that the horizontal lower portion of each deck has a greater affect on the burn and suppression rate of a pallet than the other deck portions and column portions. Thus, in a preferred embodiment, mid-top portion 432 and bottom portion 436 of pallet 410 are formed of a plastic material each having a predetermined level of flame retardance which is higher than that of the remaining components of the pallet. Again, the remaining components may be little or no fire retardance properties.

Even more particularly for pallets having multiple deck portions, in a more preferred embodiment, it is taught herein that the horizontal lower portion of the top deck has the greatest affect on the burn rate of a pallet and therefore requires a higher level of fire suppression than the other pallet components. Accordingly, mid-top portion 432 has a predetermined level of flame retardance which is higher than that of the remaining components of the pallet. In such an embodiment, the columns may be integrally formed with the mid-bottom deck portion of the same material (Figure 47.)

As in previous embodiments, pallet assembly 410 also includes reinforcement members therein. Bottom deck 414 includes a cross-reinforcement member 450 and peripheral reinforcement members 452, 454, 456, 458. Top deck

412 includes a cross-reinforcement member 460 which lies in a plane parallel to but along an axis perpendicular to that of reinforcement member 450.

Joining the pallet components to each other may be performed by means known to those in the art. For example, the columns may be press fit into the decks,
5 or may be snapped together into the decks by a snap attachment (one type is shown in U.S. Patent No. 6,006,677). The parts may also be welded via a welding for dissimilar materials.

Thus, this pallet embodiment allows only those desired components to be formed from an fire retardant material, such that the pallet may have the desired fire
10 retardant, and burn and suppression characteristics. This pallet also allows the manufacturer the freedom to selectively control and allocate the material and/or amount of fire retardant additive in each component. Accordingly, this provides a lower cost pallet, since the entire pallet no longer needs to be formed of a single material, particularly a more costly single fire retardant material. Accordingly, the
15 desired fire retardant levels for each pallet component and for the overall pallet may be achieved for obtaining desired pallet burn and suppression characteristics in a cost efficient manner, so that the pallet disclosed herein may meet the industry specifications, such as those outlined by, and including but not limited to, NFPA 13, FMRC 4995, and UL 2335, incorporated herein by reference. Thus, the fire
20 retardant additives may be adjusted such that the pallet as a whole meets the desired guidelines. Particularly, the burn and suppression characteristics should be substantially equivalent or better than a similarly sized wood pallet, such as one made from hard wood. Accordingly, the pallet should have a fire rating and burn rate no higher than wood. The particular materials used may be those known in the
25 art for producing fire retardant characteristics in pallets, including but not limited to commodity items, such as polymer resins like polyolefins having a halogen based flame retardant resin additive.

Of course, as illustrated herein, these teachings are applicable to pallets of any size, design, and to those manufactured by various processes. By way of
30 example and not limitation, the teachings herein may also apply to reinforced pallets (Figure 46) or to pallets without additional reinforcement in the top and/or bottom

decks (Figures 46a, 46b, 46c). The teachings may also apply to panels having internal ribbing, cross-ribbing, and box-beams 492a,b (Figure 47), or to pallets without (Figure 46c). They are applicable to one deck pallets, two deck pallets, and pallets formed from multiple deck portions. Because some fire retardant additives
5 may cause some polymer carriers to lose some stiffness, the teachings herein are particularly applicable to reinforced pallets.

While embodiments of the invention have been illustrated and described, it is not intended that these embodiments illustrate and describe all possible forms of the invention. Rather, the words used in the specification are words of description
10 rather than limitation, and it is understood that various changes may be made without departing from the spirit and scope of the invention.

WHAT IS CLAIMED IS:

- 2 1. A reinforced pallet assembly comprising:
3 a first pallet deck having a first outer member and a first intermediate
4 member, each having a one of a first pair of mating cross-rib surfaces which are
5 mounted together to define a first plurality of box-beam sections within the first
6 pallet deck;
7 a second pallet deck having a second outer member and a second
8 intermediate member, each having a one of a second pair of mating cross-rib
9 surfaces which are mounted together to define a second plurality of box-beam
10 sections within the second pallet deck;
11 at least one reinforcement member disposed between the second outer
12 member and the second intermediate member for providing stiffness thereto; and
13 a plurality of columns extending between the first intermediate member and
14 the second intermediate member.
- 15 2. The reinforced pallet assembly of claim 1, wherein the first and second
16 pallet decks and columns comprise a plastic material and wherein the at least one
17 reinforcement member comprises a metal material.
- 18 3. The reinforced pallet assembly of claim 1 wherein the columns include
19 a first column portion projecting from the first intermediate portion, and a second
20 column portion projecting from the second intermediate portion and attached to the
21 first column portion.
- 22 4. The reinforced pallet assembly of claim 1 wherein the second pallet
23 deck is defined by a unitary construction comprising a plurality of peripheral rail
24 members and at least one cross-rail extending between a pair of peripheral rail
25 members.
- 26 5. The reinforced pallet assembly of claim 4 wherein the at least one
27 reinforcement member is disposed within the at least one cross-rail of the second
28 pallet deck.

1 6. The reinforced pallet assembly of claim 4 wherein the at least one
2 reinforcement member is disposed within the peripheral rail members of the second
3 pallet deck.

4 7. The reinforced pallet assembly of claim 1 wherein the first pallet deck
5 further comprises a second reinforcement member disposed between the first outer
6 member and the first intermediate member which is oriented generally perpendicular
7 to the at least one reinforcement member.

8 8. The reinforced pallet assembly of claim 1, wherein the first pallet deck
9 includes a second reinforcement member disposed therein extending substantially
10 along a central axis thereof.

11 9. The reinforced pallet assembly of claim 1, wherein the second pallet
12 deck includes a channel within which the at least one reinforcement member is
13 disposed.

14 10. A pallet assembly, comprising:
15 a first pallet member having a first pallet surface including a first plurality
16 of cross-rib members;
17 a second pallet member disposed adjacent the first pallet member and having
18 a second pallet surface including a second plurality of cross-rib members
19 corresponding to the first plurality of cross-rib members, the first and second
20 plurality of cross-rib members being secured together to form a first pallet deck, the
21 second pallet member further including a mating surface opposite the second pallet
22 surface;
23 a first reinforcement member disposed between the first and second pallet
24 members along a first axis thereof;
25 a third pallet member disposed adjacent the second pallet member and having
26 a third pallet surface including a third plurality of cross-rib members, the third pallet
27 member having an other mating surface opposite the third pallet surface;
28 a fourth pallet member disposed adjacent the third pallet member and having
29 a fourth pallet surface including a fourth plurality of cross-rib members

1 corresponding to the third plurality of cross-rib members, the third and fourth
2 plurality of cross-rib members being secured together to form a second pallet deck;
3 a second reinforcement member disposed between the third and fourth pallet
4 members along a second axis thereof oriented substantially perpendicular to the first
5 reinforcement member; and
6 a plurality of column portions extending between the second and third pallet
7 members.

8 11. The pallet assembly of claim 10 further comprising other
9 reinforcement members extending proximate the periphery of the second pallet
10 member.

11 12. The pallet assembly of claim 11 wherein the first reinforcement
12 member and other reinforcement members are integrally formed to define a unitary
13 construction.

14 13. The pallet assembly of claim 10 wherein the mating surface of the
15 second pallet member and the other mating surface of the third pallet portion are
16 secured together to define the plurality of column portions.

17 14. A reinforced pallet comprising:

18 a top deck having a top deck upper surface, a top deck lower surface, and a
19 plurality of upper box beam sections disposed between the top deck upper and lower
20 surfaces;

21 a bottom deck having a bottom deck upper surface, a bottom deck lower
22 surface, and a plurality of lower box beam sections disposed between the bottom
23 deck upper and lower surfaces, the bottom deck further including at least one
24 elongate reinforcement member disposed therein; and

25 a plurality of columns extending between and attached to the top deck and
26 bottom deck.

27 15. The reinforced pallet of claim 14 wherein the top deck includes first
28 column portions projecting downwardly therefrom, and the bottom deck includes
29 corresponding second column portions projecting upwardly therefrom corresponding

1 to and securely mating with the first column portions to define the plurality of
2 columns.

3 16. The reinforced pallet of claim 14 wherein the bottom deck includes a
4 peripheral deck rail and at least one cross-rail extending therebetween.

5 17. The reinforced pallet of claim 16 wherein the at least one
6 reinforcement member is disposed within the at least one cross-rail of the bottom
7 deck.

8 18. The reinforced pallet of claim 16 wherein the at least one
9 reinforcement member is disposed within the peripheral rail of the bottom deck.

10 19. The reinforced pallet of claim 14 wherein the top deck includes at least
11 one other elongate reinforcement member disposed therein and oriented along an
12 axis generally perpendicular to the at least one elongate reinforcement member.

13 20. The reinforced pallet of claim 14, wherein the top deck includes an
14 other reinforcement member disposed therein and extending substantially across a
15 central axis thereof.

16 21. The reinforced pallet of claim 14 wherein the top deck includes a top
17 member and a mid-top member each having mating corresponding top deck rib
18 members which define the plurality of upper box beam sections, and further
19 including a second reinforcement member disposed between the top member and
20 mid-top member and oriented generally perpendicular to the at least one
21 reinforcement member.

22 22. The reinforced pallet of claim 14 wherein the bottom deck includes
23 a bottom member and a mid-bottom member each having mating corresponding
24 bottom deck rib members which define the plurality of lower box beam sections,
25 wherein the at least one reinforcement member is disposed between the bottom
26 member and mid-bottom member.

1 23. The reinforced pallet of claim 14, wherein the bottom deck includes
2 a channel within which the at least one reinforcement member is disposed.

3 24. The reinforced pallet of claim 14, wherein the at least one
4 reinforcement member has an I-beam cross-section.

5 25. The reinforced pallet of claim 14, wherein the upper box beam sections
6 and the lower box beam sections are defined by a plurality of rib members within
7 each of the top and bottom decks.

8 26. A reinforced pallet comprising:
9 a top deck having an top deck upper surface and a top deck lower surface
10 spaced apart from each other and oriented substantially parallel to each other, the top
11 deck further including a first plurality of rib members extending between the top
12 deck upper and lower surfaces;
13 a bottom deck having a bottom deck upper surface and a bottom deck lower
14 surface spaced apart from each other and including a second plurality of rib
15 members extending between the bottom deck upper and lower surfaces;
16 at least one longitudinally extending reinforcement member disposed
17 between the bottom deck upper and lower surfaces; and
18 at least one column member extending between the top deck lower surface
19 and the bottom deck upper surface and attached therebetween.

20 27. The reinforced pallet of claim 26, wherein the top deck lower surface
21 includes at least one first column portion projecting downwardly therefrom, and
22 wherein the upper bottom surface includes at least one second column portion
23 extending upwardly therefrom and mating with the first column portion to define the
24 at least one column member.

25 28. The reinforced pallet of claim 26 wherein the top deck includes a top
26 member having a first surface corresponding to the top deck upper surface and a first
27 opposed surface defined by rib members, the top deck further including a mid-top
28 member having a second surface corresponding to the top deck lower surface and
29 a second opposed surface defined by rib member, such that first opposed surface and

1 the second opposed surface are attached to define the first plurality of rib members
2 extending therebetween.

3 29. The reinforced pallet of claim 26 wherein the bottom deck includes
4 a bottom member having a first surface corresponding to the bottom deck lower
5 surface and a first opposed surface defined by rib members, and a mid-bottom
6 member having a second surface corresponding to the bottom deck upper surface
7 and a second opposed surface defined by rib members, such that the first and second
8 opposed surfaces are attached to define the second plurality of rib members
9 extending therebetween, and wherein the at least one reinforcement member is
10 disposed between the bottom member and the mid-bottom member.

11 30. The reinforced pallet of claim 26 wherein the bottom deck includes a
12 peripheral rail and at least one bottom deck cross rail extending therebetween.

13 31. The reinforced pallet of claim 30 wherein the at least one reinforcement
14 member is disposed within the at least one bottom deck cross-rail.

15 32. The reinforced pallet of claim 30 wherein the at least one reinforcement
16 member is disposed within the peripheral rail of the bottom deck.

17 33. The reinforced pallet of claim 26, wherein the top deck includes a
18 second reinforcement member disposed therein and extending substantially across
19 a central axis thereof.

20 34. The reinforced pallet of claim 26, wherein the top deck includes a
21 second reinforcement member disposed therein and oriented generally perpendicular
22 to the at least one reinforcement member.

23 35. The reinforced pallet of claim 26, wherein the bottom deck includes
24 a channel within which the at least one reinforcement member is disposed.

25 36. The reinforced pallet of claim 26, wherein the at least one
26 reinforcement member has an I-shaped cross section.

1 37. The reinforced pallet assembly of claim 26, wherein the upper bottom
2 surface includes a plurality of second column portions extending upwardly
3 therefrom and mating with the plurality of first column portions to define a plurality
4 of columns between the second and third members.

5 38. The pallet assembly of claim 26 further comprising a pair of
6 reinforcement members extending around a periphery of the first pallet deck,
7 wherein the pair of reinforcement members are oriented substantially parallel to each
8 other.

9 39. A reinforced pallet assembly, comprising:
10 a first member having a first lower surface defined by a plurality of
11 downstanding cross-rib members;
12 a second member having a second lower surface and also including a second
13 upper surface defined by a plurality of upstanding cross-rib members corresponding
14 to the downstanding cross-rib members of the first member and mounted therewith;
15 a third member spaced apart from the second member, the third member
16 having a third upper surface and a generally planar third lower surface defined by
17 a plurality of downstanding cross-rib members, the third upper surface and the
18 second lower surface having corresponding flanged surfaces securely mounted to
19 each other to form a plurality of columns;
20 a fourth member having a fourth upper surface defined by a plurality of
21 upstanding cross-rib members corresponding to the downstanding cross-rib
22 members of the third member and mounted therewith;
23 a reinforcement member disposed between the third member and fourth
24 member for providing strength thereto; and
25 at least one column extending between the second and third members.

26 40. A reinforced pallet comprising:
27 a first deck portion having a first upper surface and a first lower surface
28 defined by a first plurality of rib members disposed therein; and
29 a second deck portion having a second lower surface and a second upper
30 surface defined by a second plurality of rib members disposed therein, the second
31 plurality of rib members mating with corresponding first plurality of rib members

1 to form a pallet deck, the second deck portion including a plurality of support
2 members defining the second lower surface; and
3 at least one elongate reinforcement member disposed between the first and
4 second deck portions.

5 41. A pallet assembly comprising:
6 a first pallet member having a first surface defined by a first plurality of
7 cross-rib members;
8 a second pallet member having a second surface defined by a second
9 plurality of cross-rib members which are mounted to the first plurality of cross-
10 members to define a first pallet deck;
11 a third pallet member mounted to the second pallet portion by a plurality
12 column portions extending therebetween, the third pallet member having a third
13 surface defined by a third plurality of cross-rib members;
14 a fourth pallet member having a fourth surface defined by a fourth plurality
15 of cross-rib member which are mounted to the third plurality of cross-rib member;
16 and
17 at least one elongate reinforcement member disposed between the third and
18 fourth pallet members within a corresponding channel formed in at least one of the
19 the third and fourth surfaces for providing stiffness thereto.

20 42. The pallet assembly of claim 41 further comprising an other elongate
21 reinforcement member disposed between the first and second pallet members.

1/34

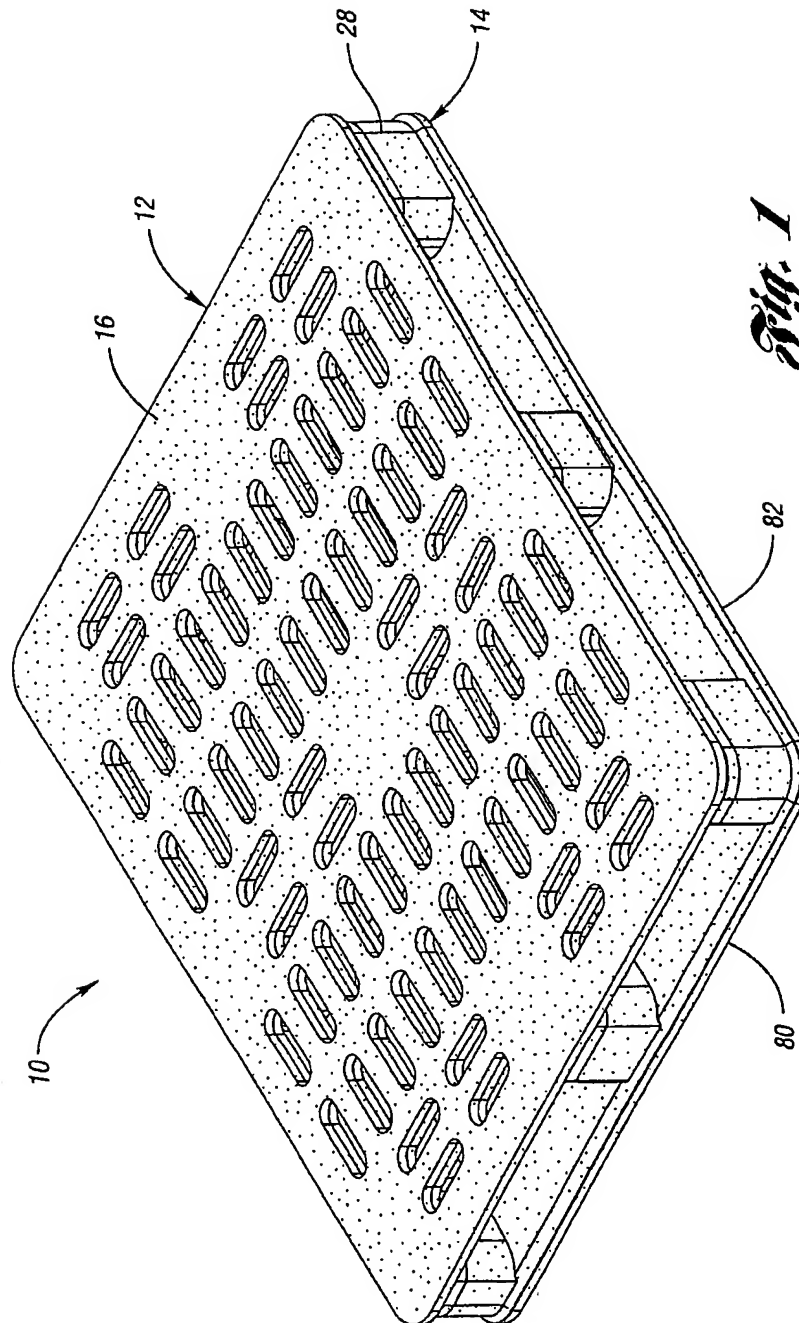


Fig. 1

3/34

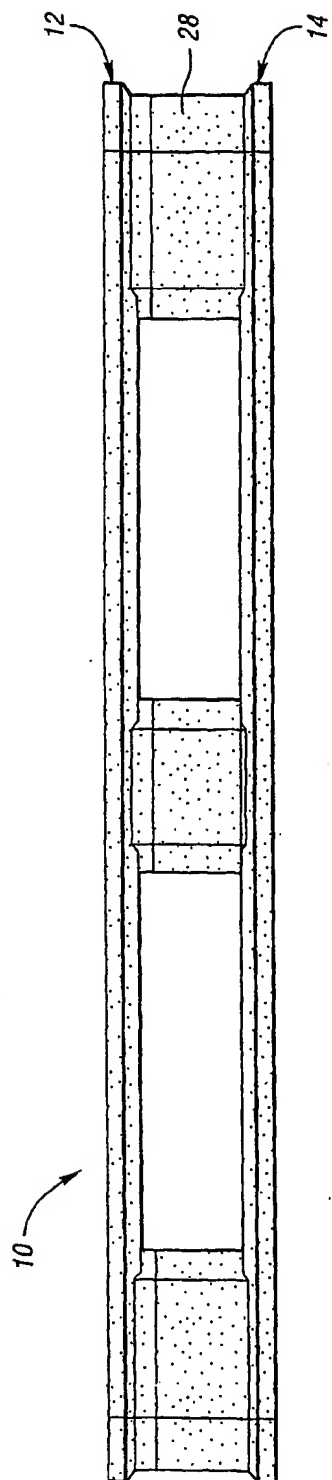


Fig. 4

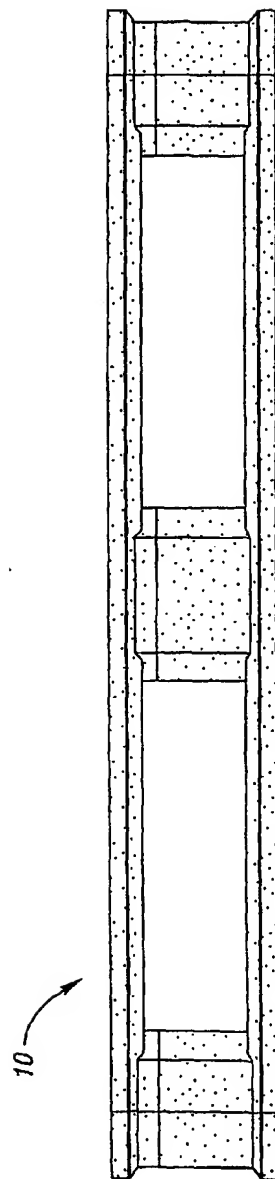


Fig. 5

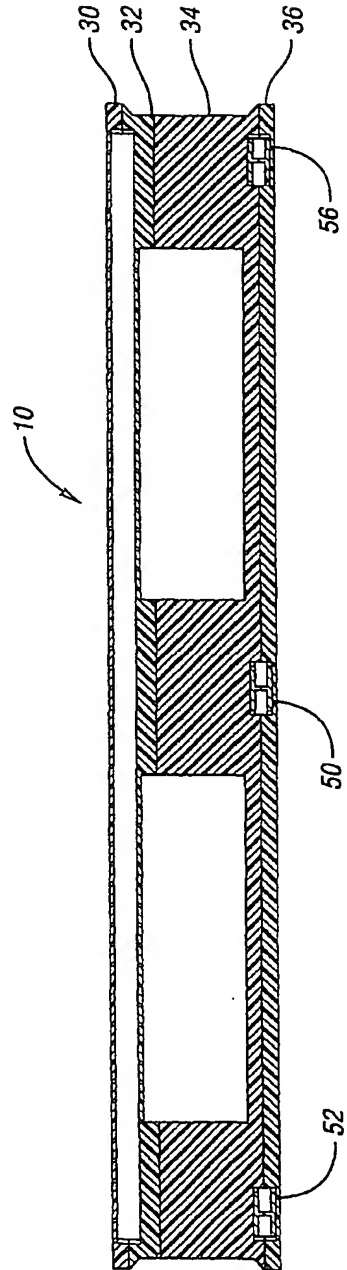


Fig. 6

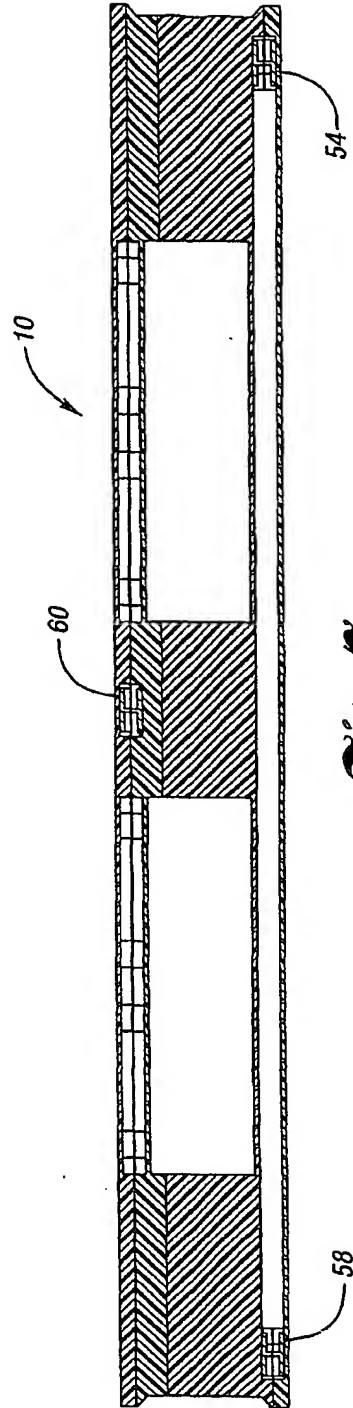


Fig. 7

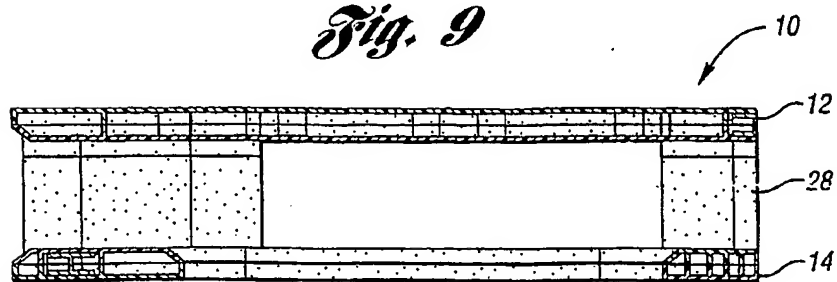
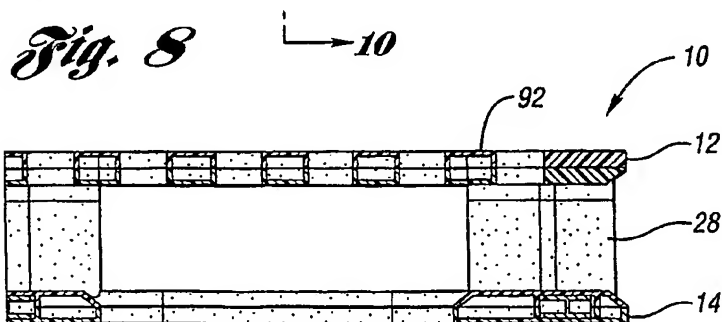
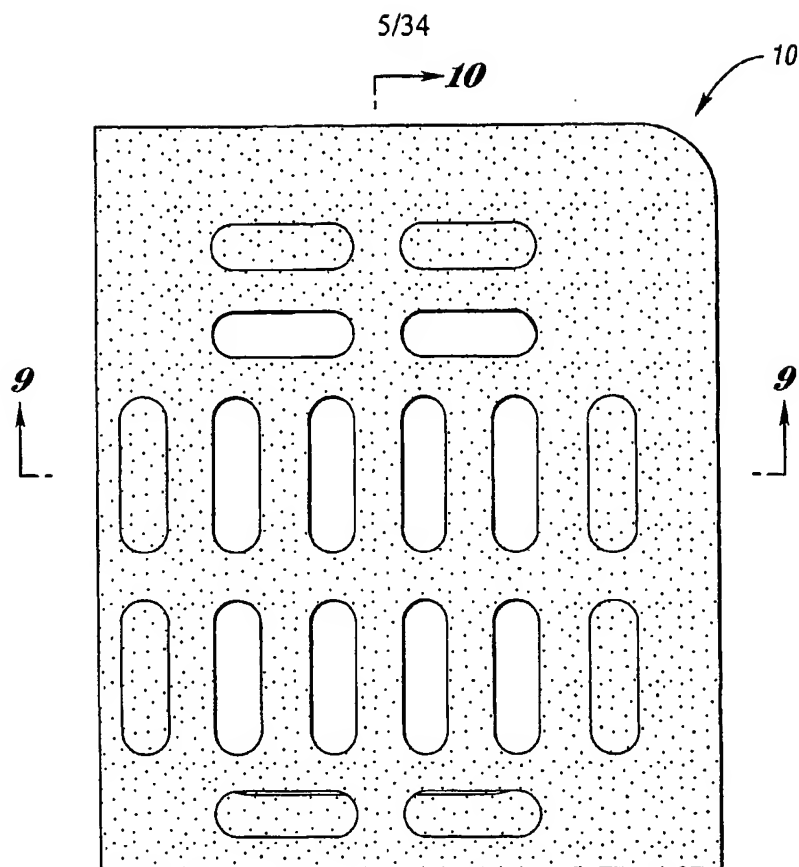


Fig. 10

6/34

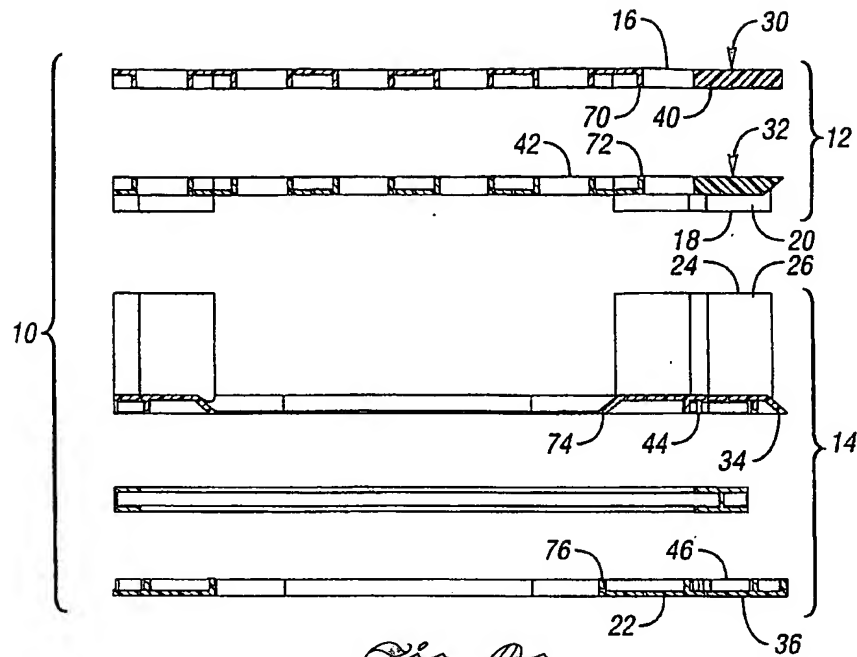


Fig. 9a

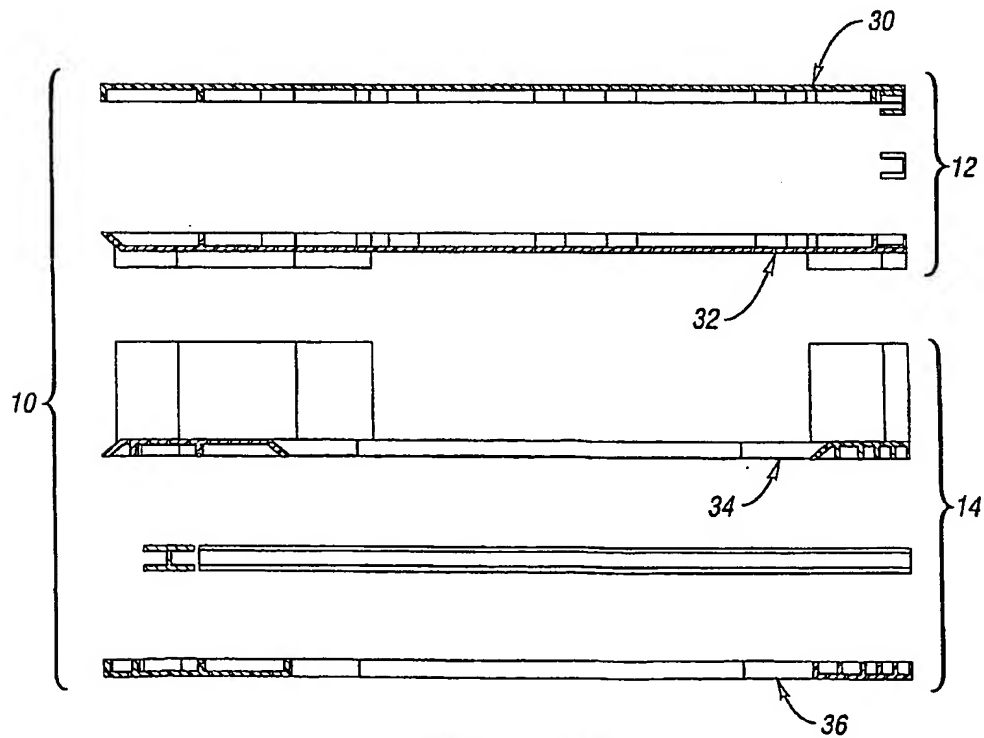
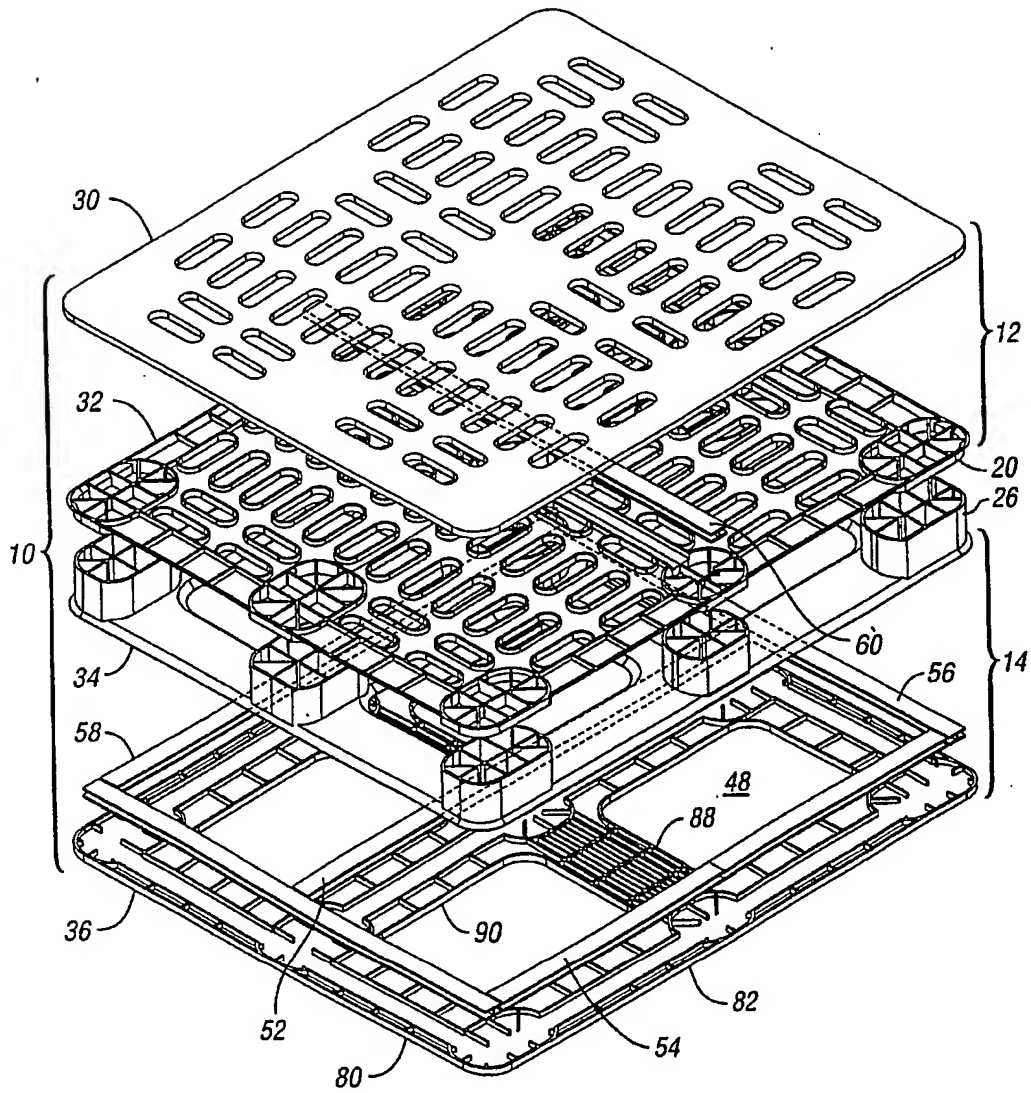
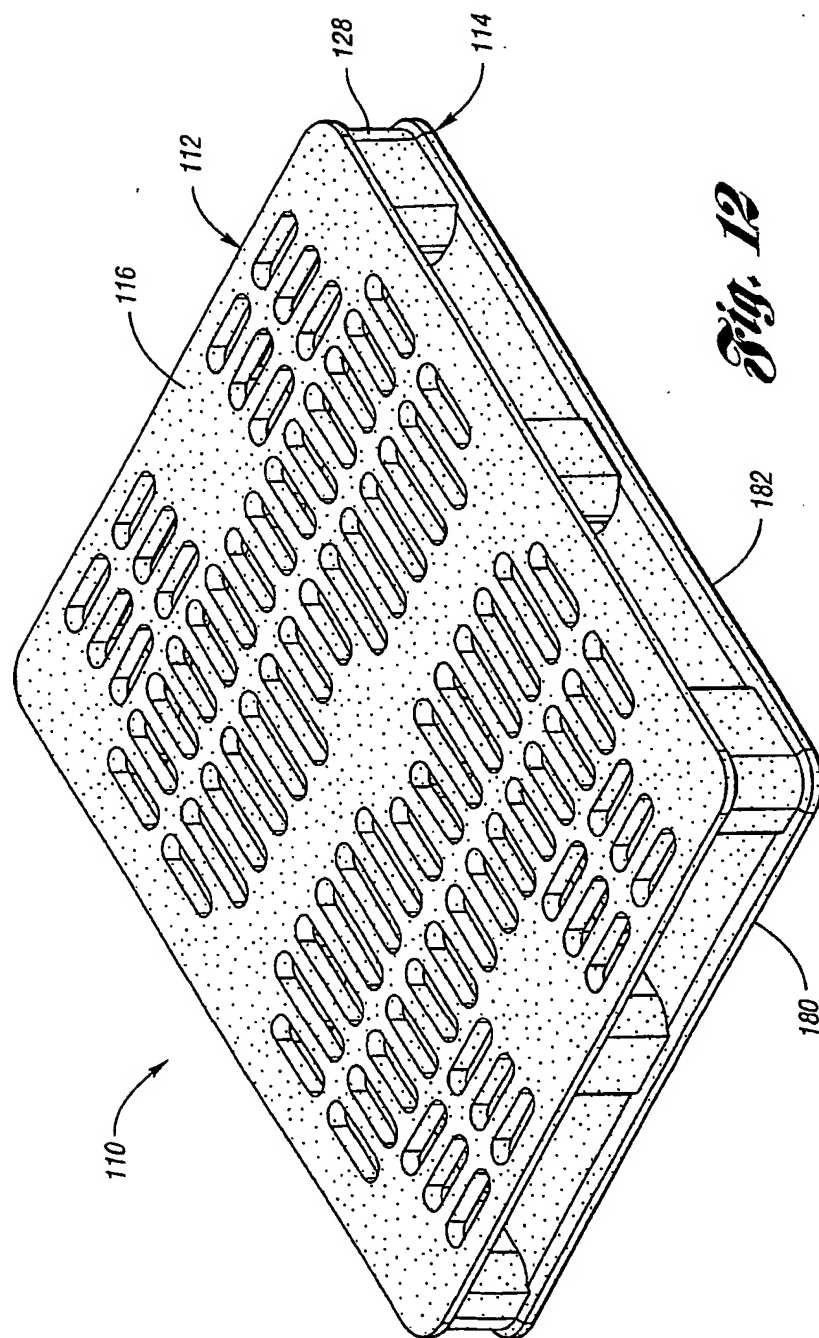


Fig. 10a

7/34

*Fig. 11*

8/34

**Fig. 12**

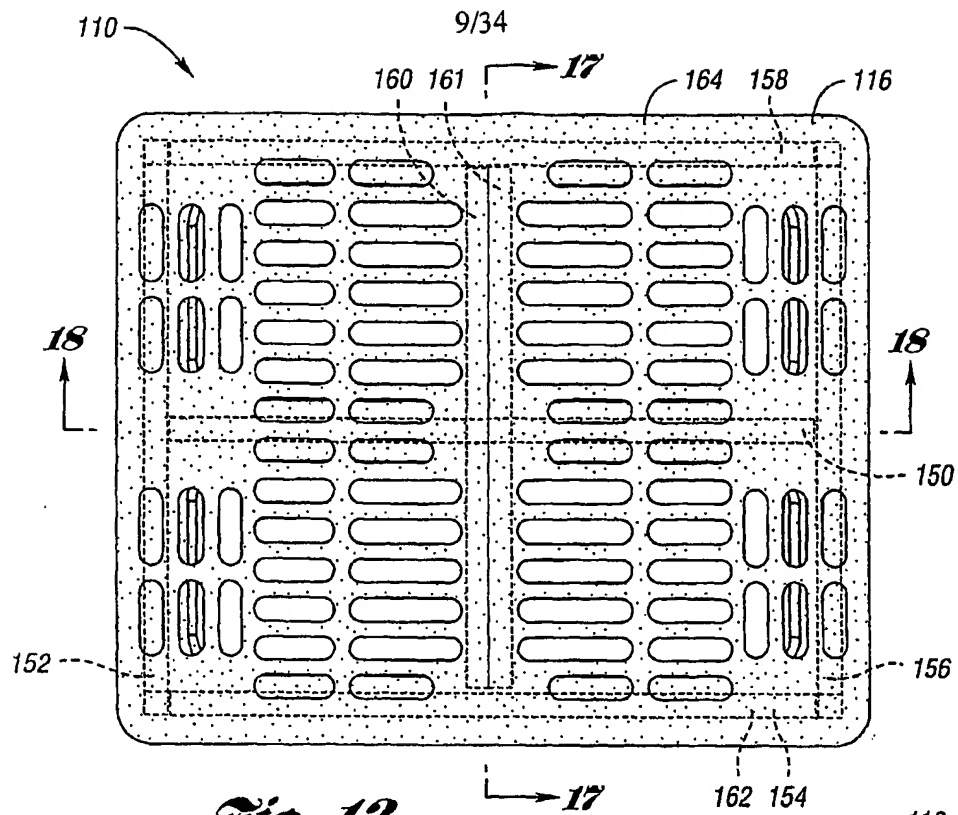


Fig. 13

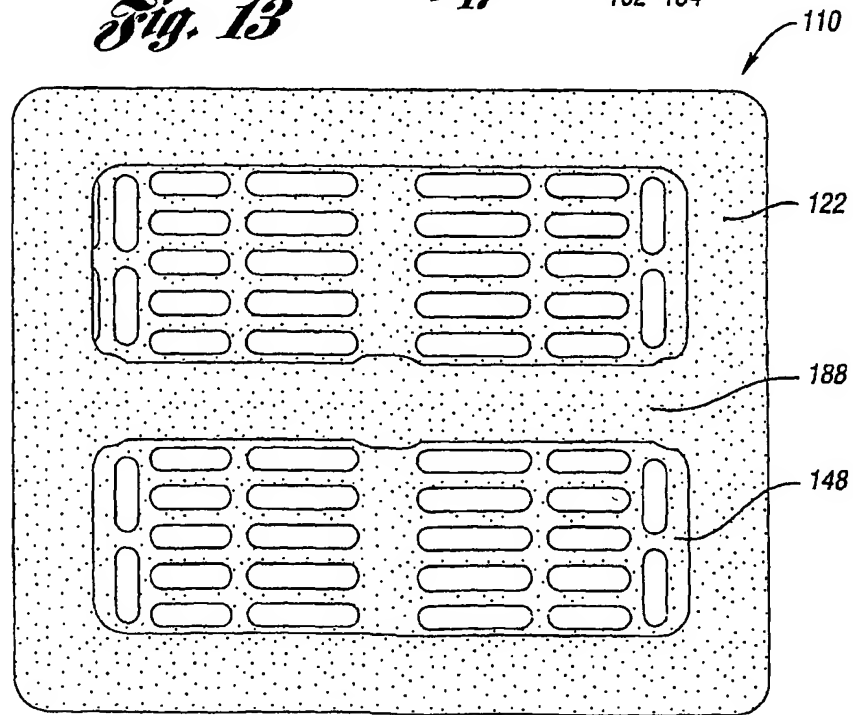


Fig. 14

10/34

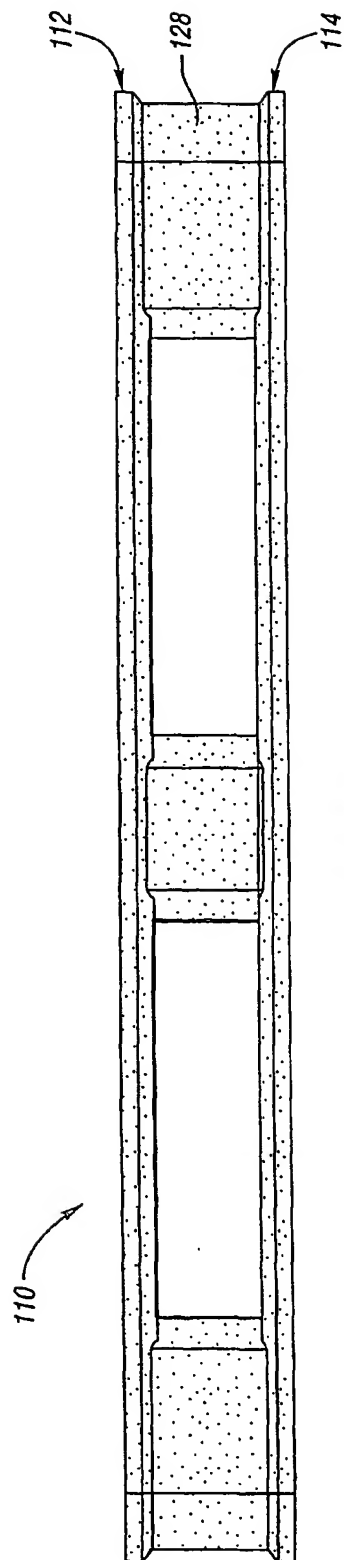


Fig. 15

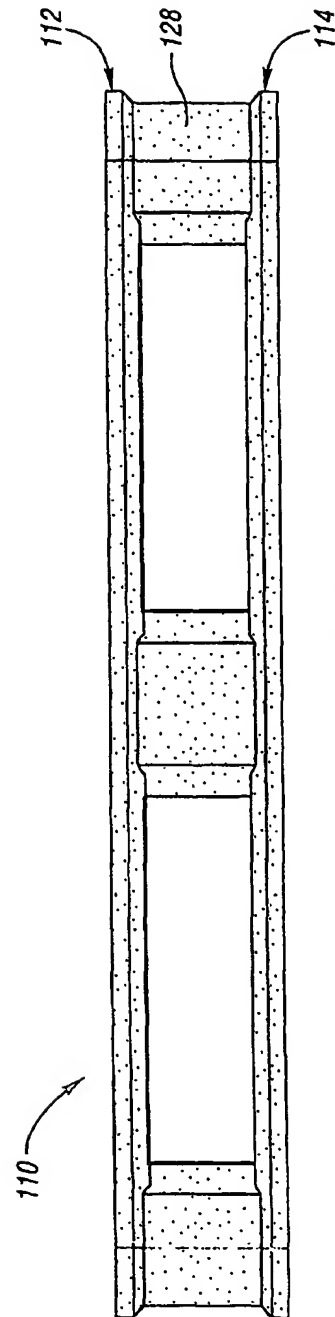


Fig. 16

11/34

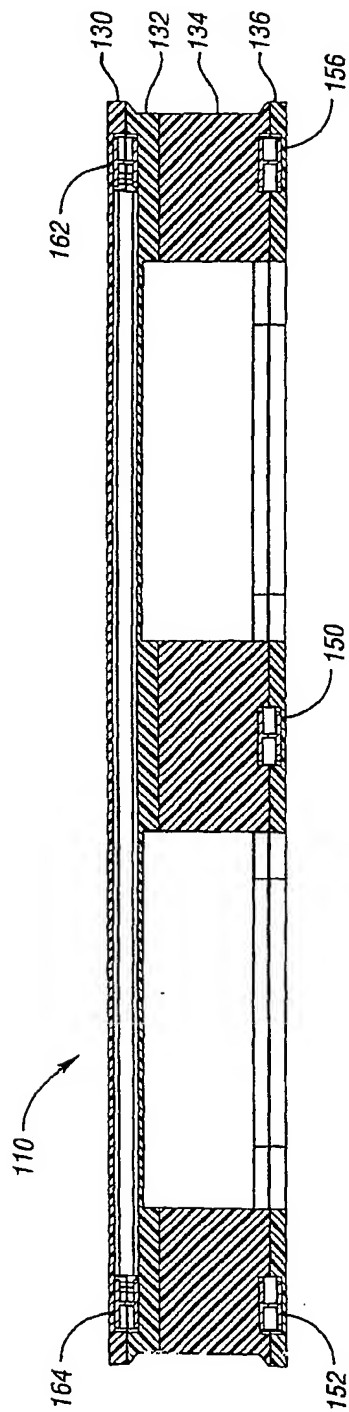


Fig. 17

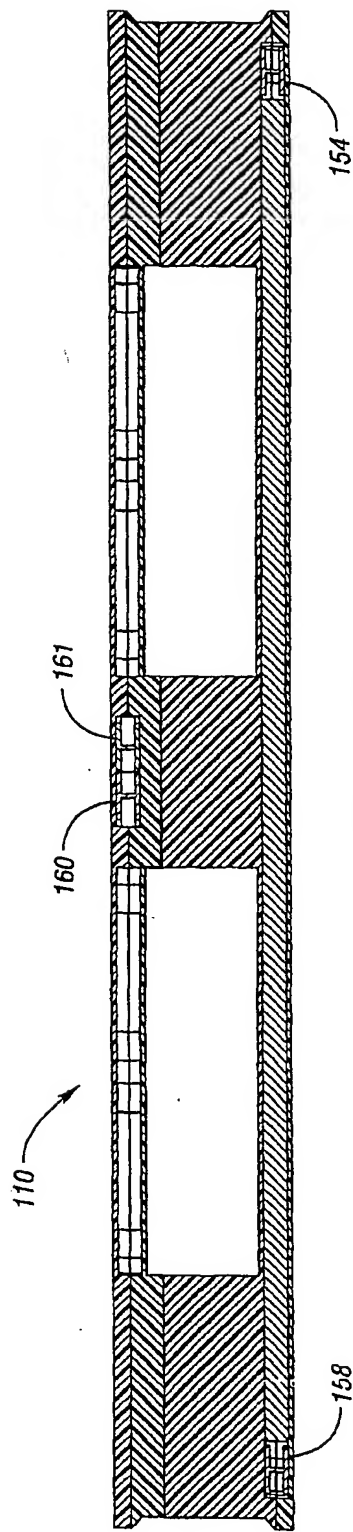


Fig. 18

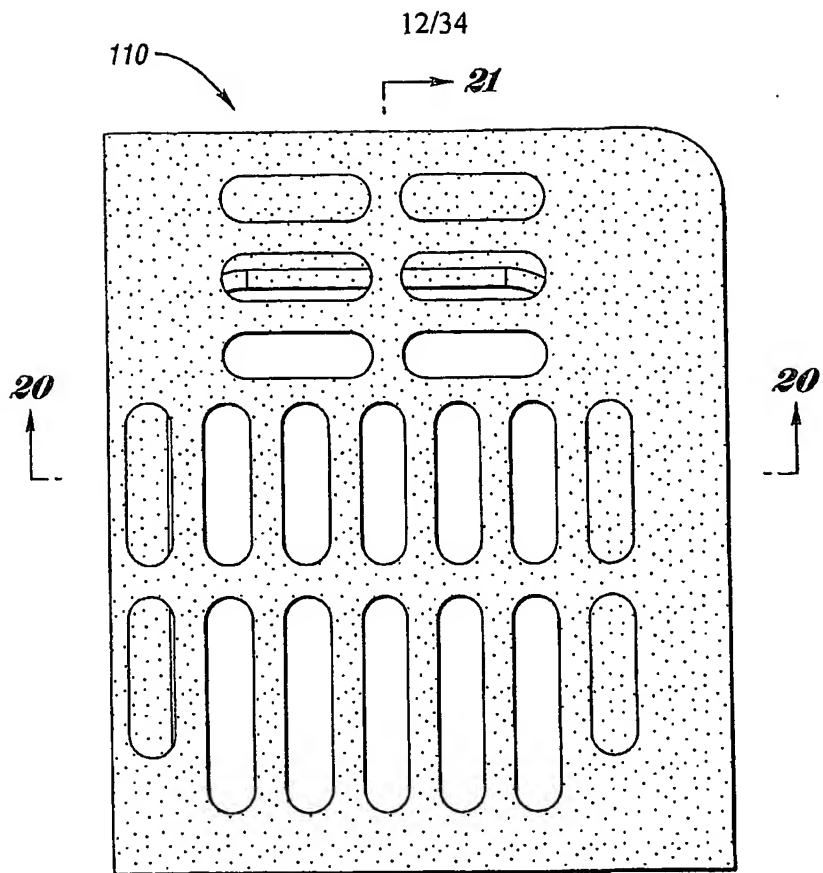


Fig. 19

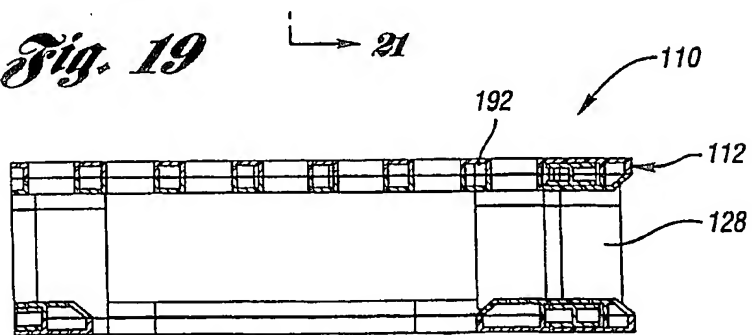


Fig. 20

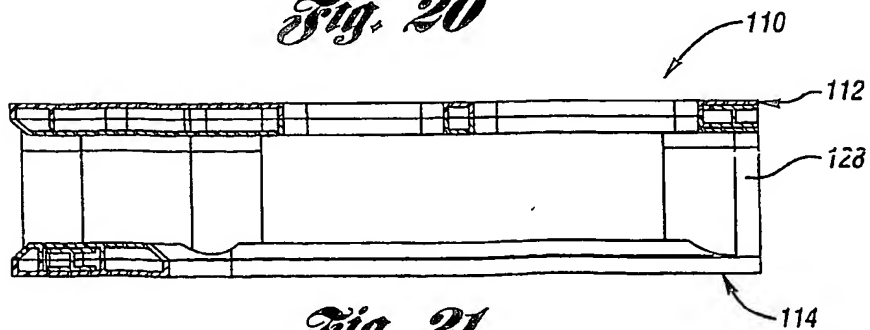


Fig. 21

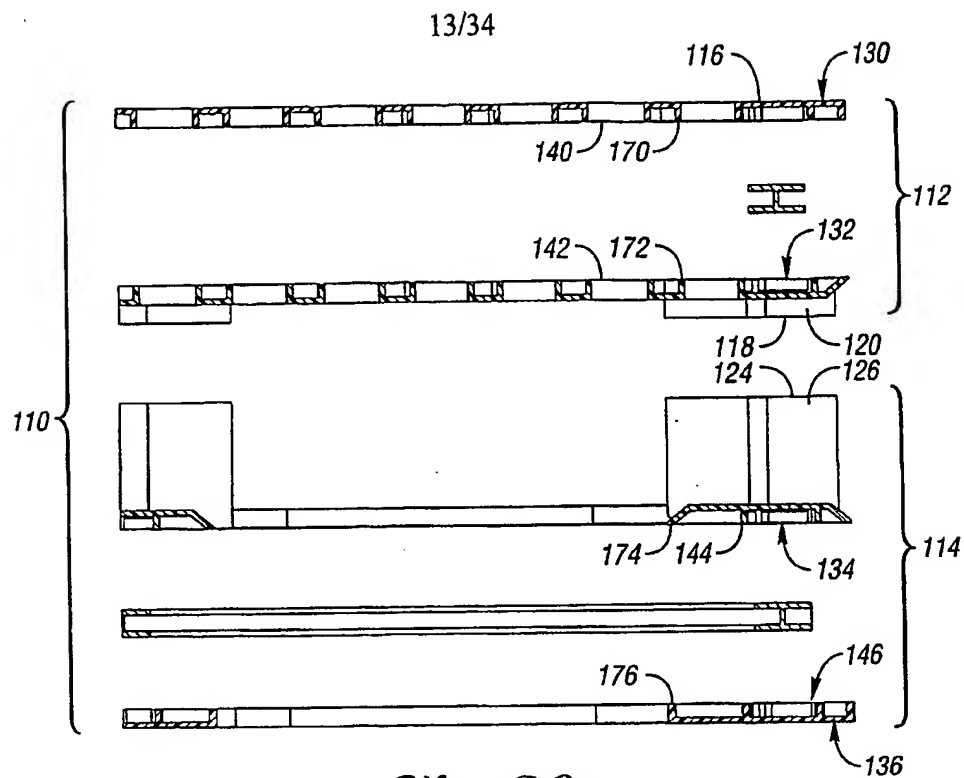


Fig. 20a

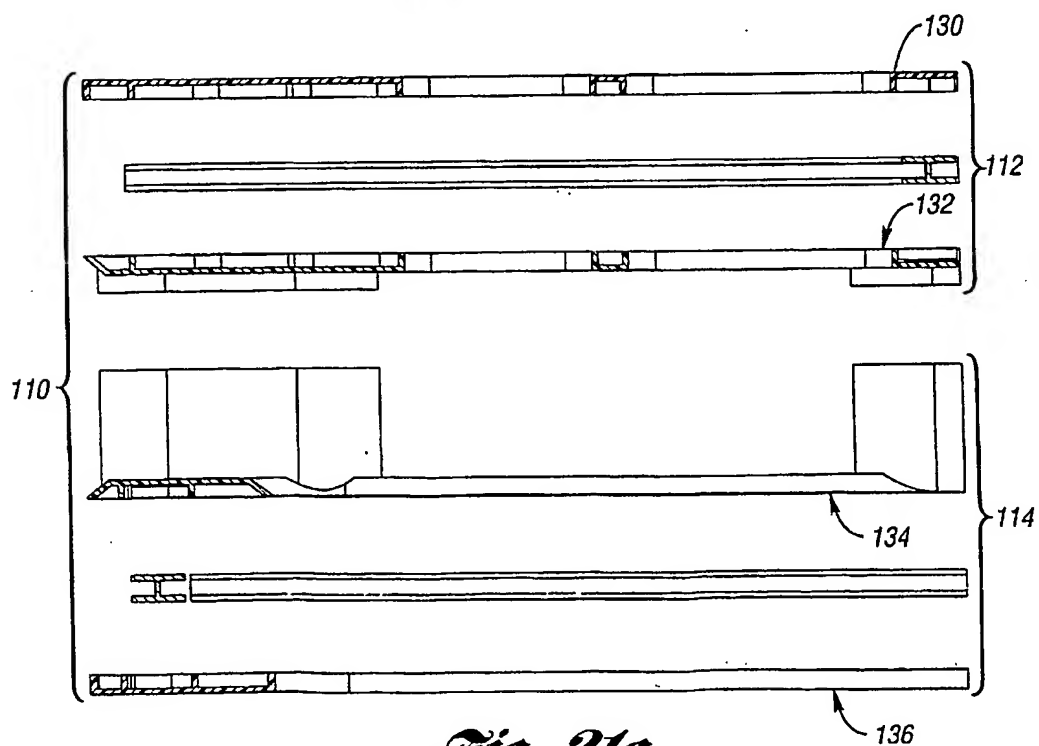
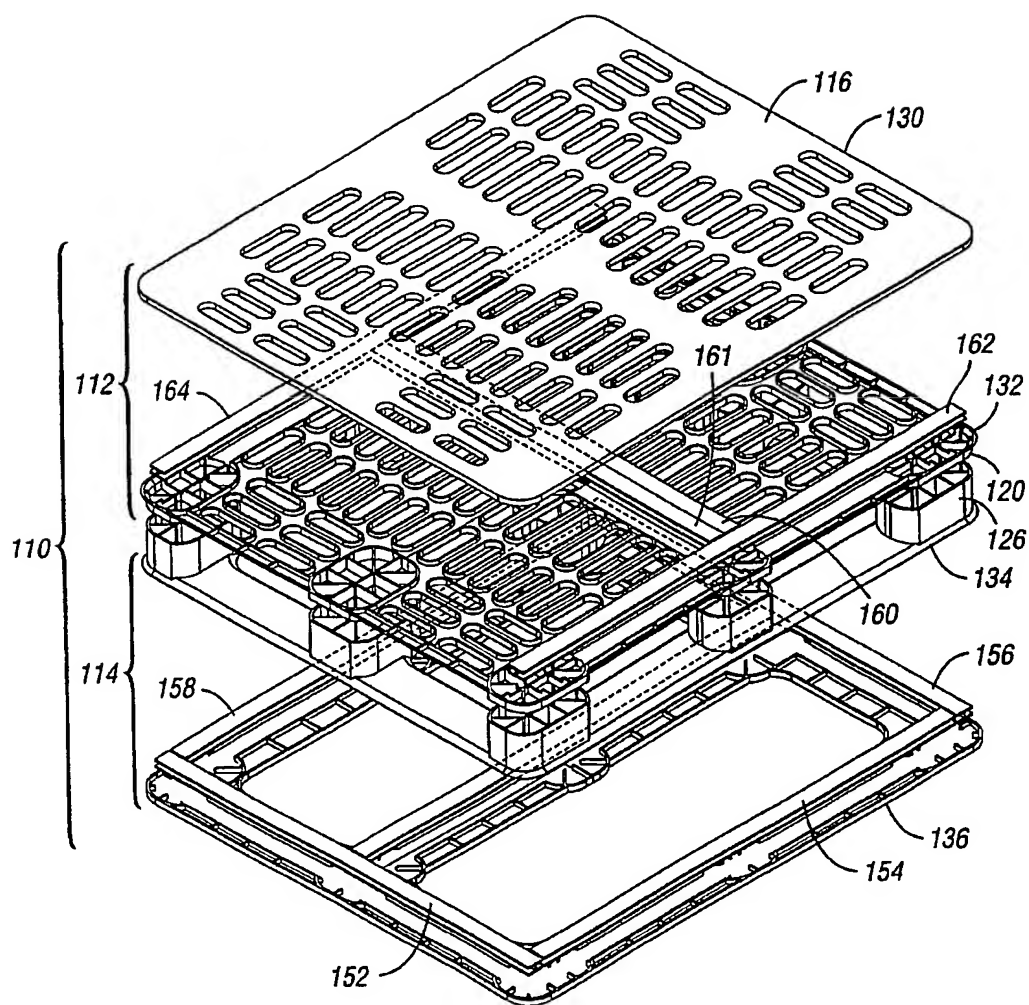


Fig. 21a

14/34

*Fig. 22*

15/34

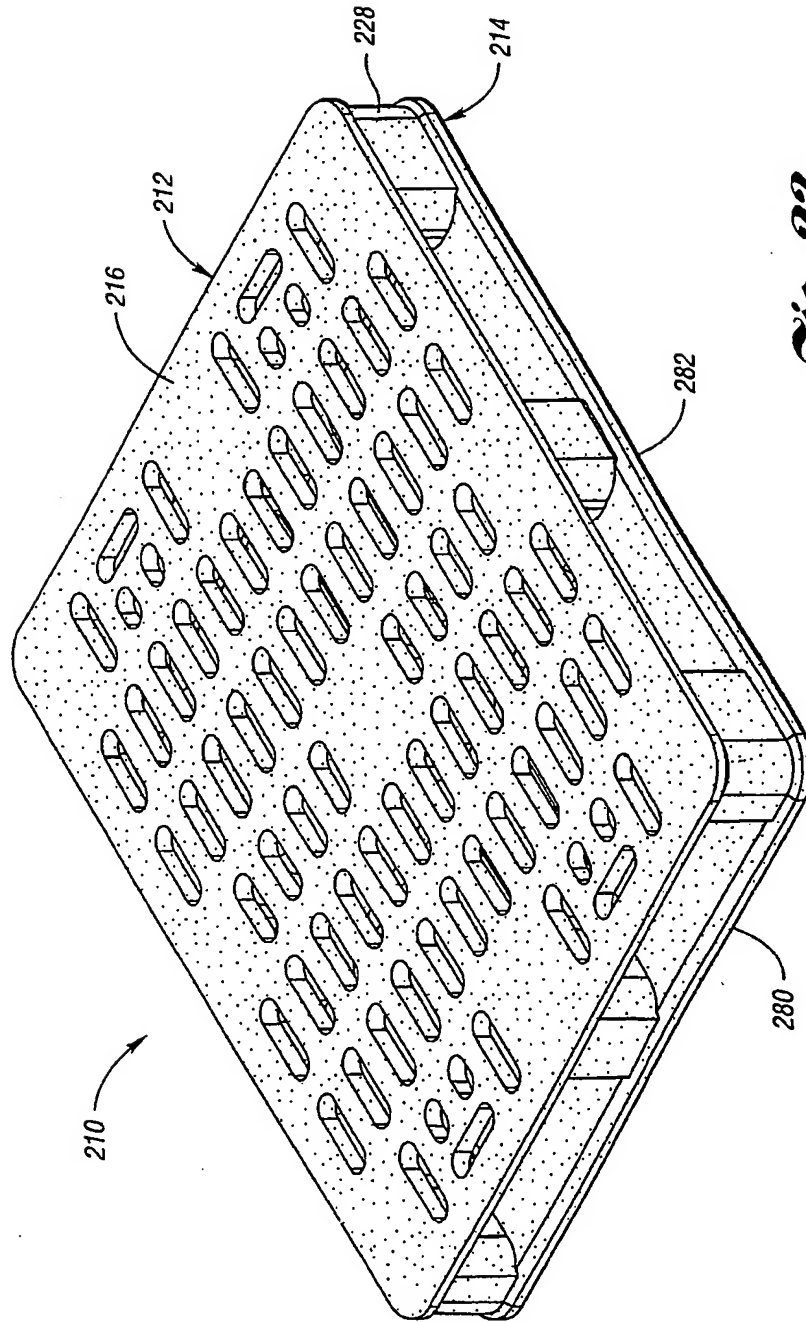


Fig. 23

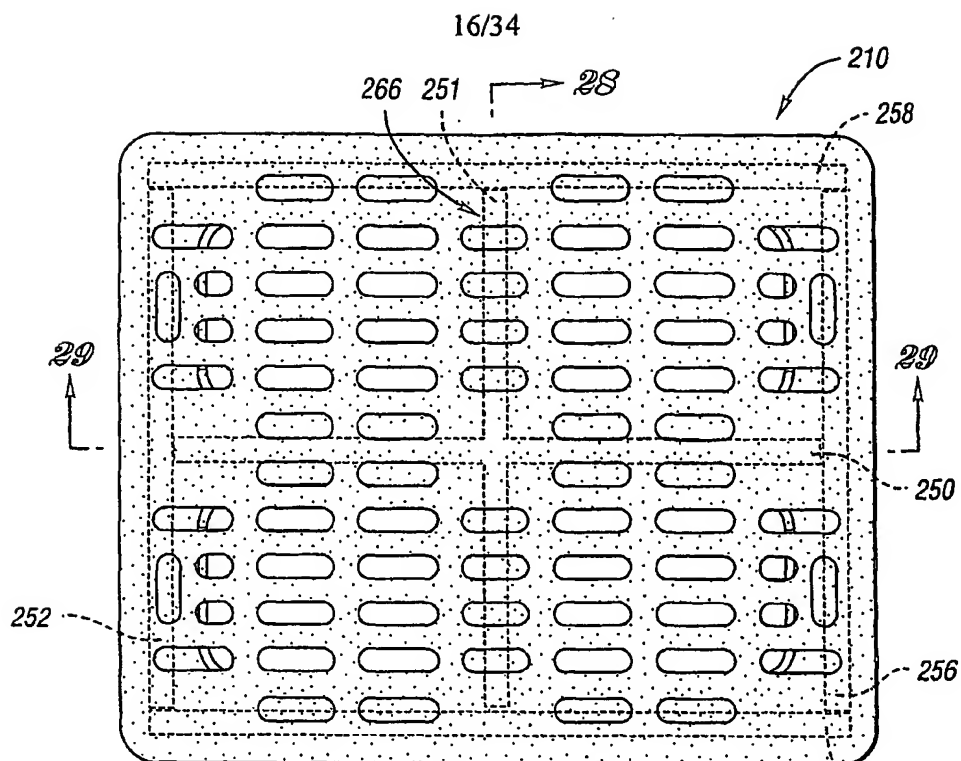


Fig. 24

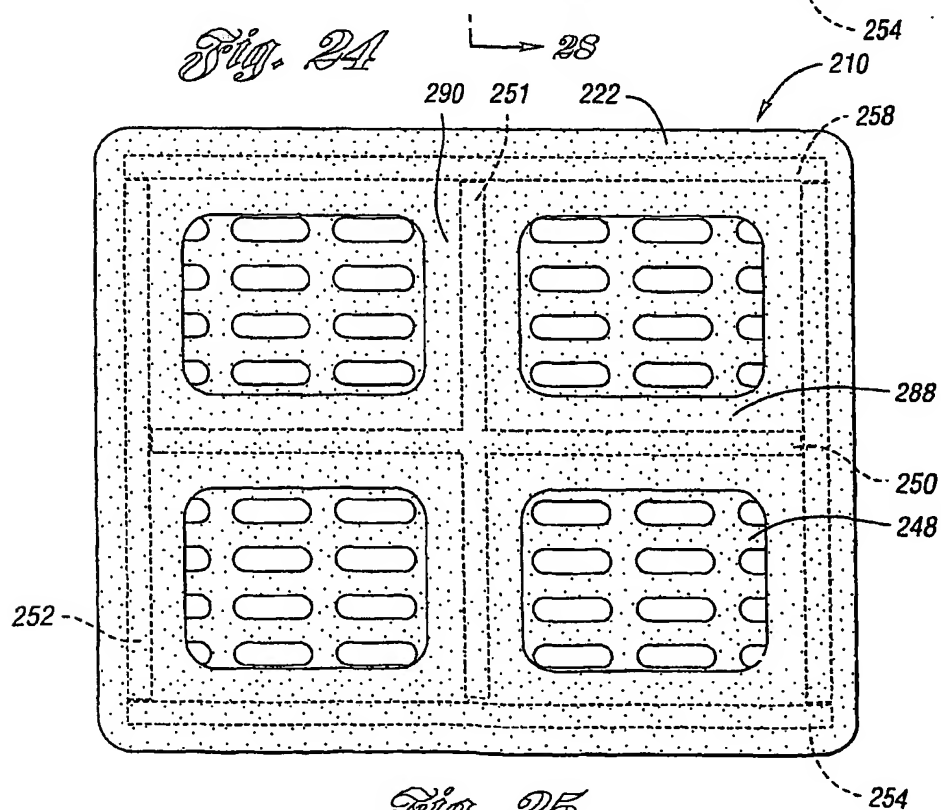


Fig. 25

17/34

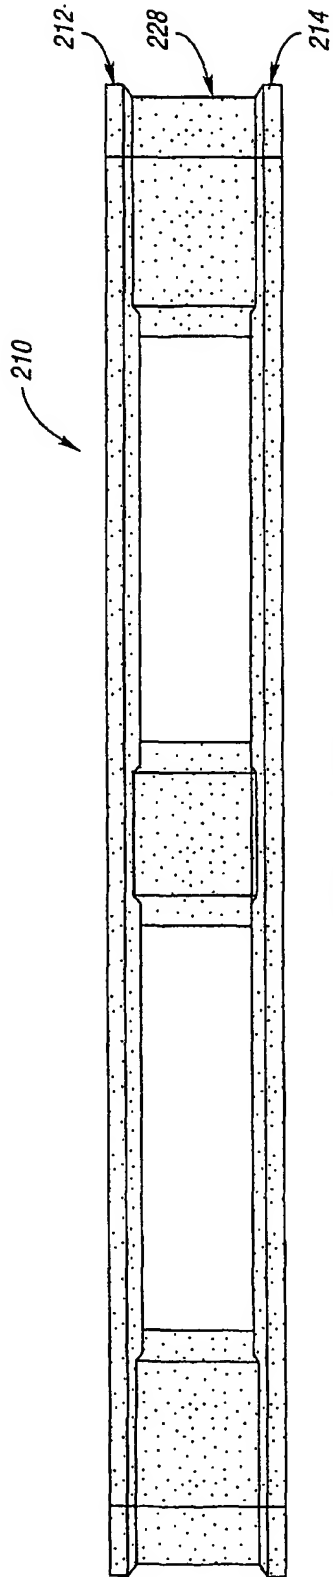


Fig. 26

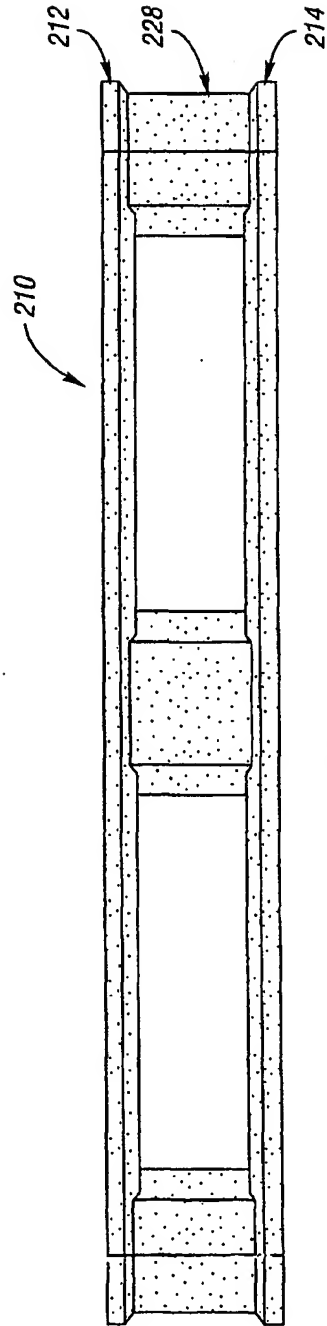


Fig. 27

18/34

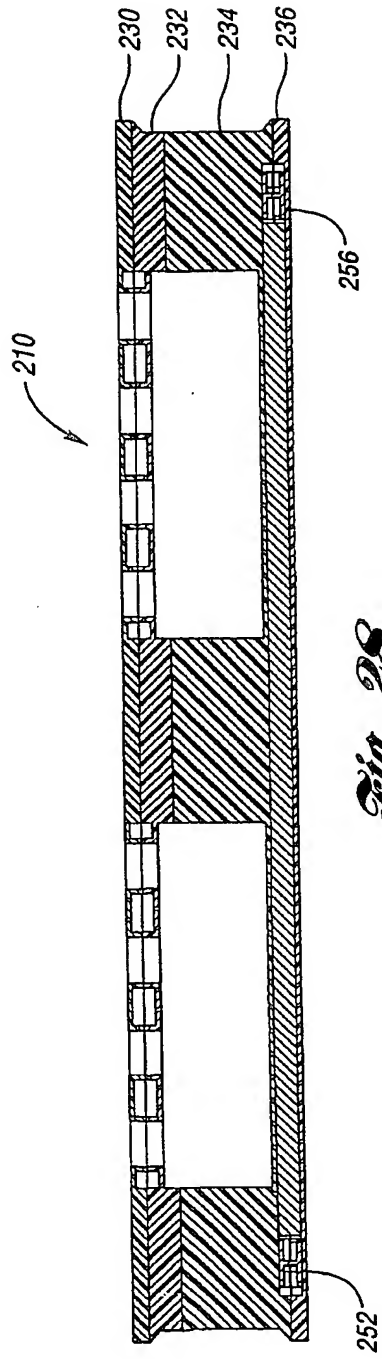


Fig. 28

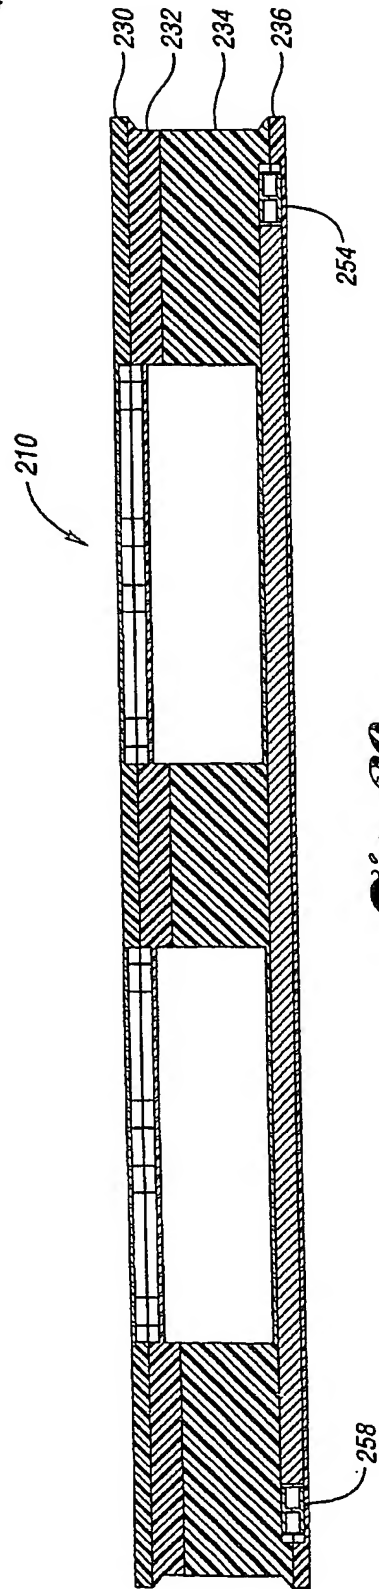


Fig. 29

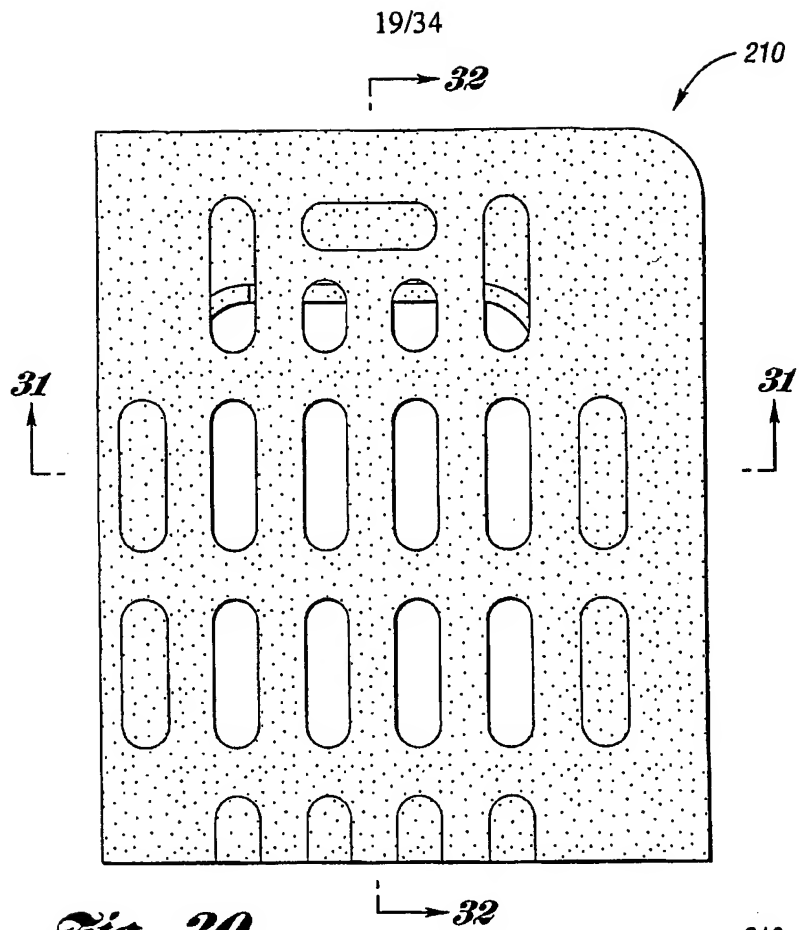


Fig. 30

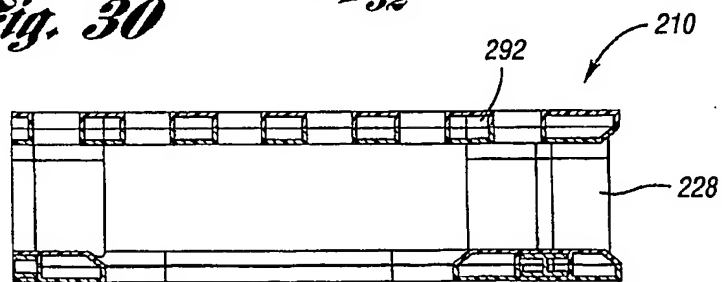


Fig. 31

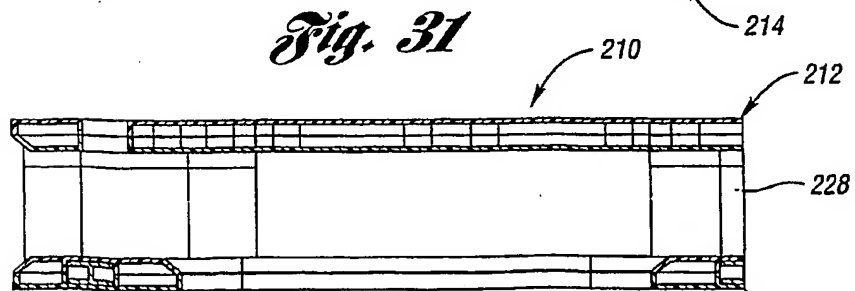


Fig. 32

20/34

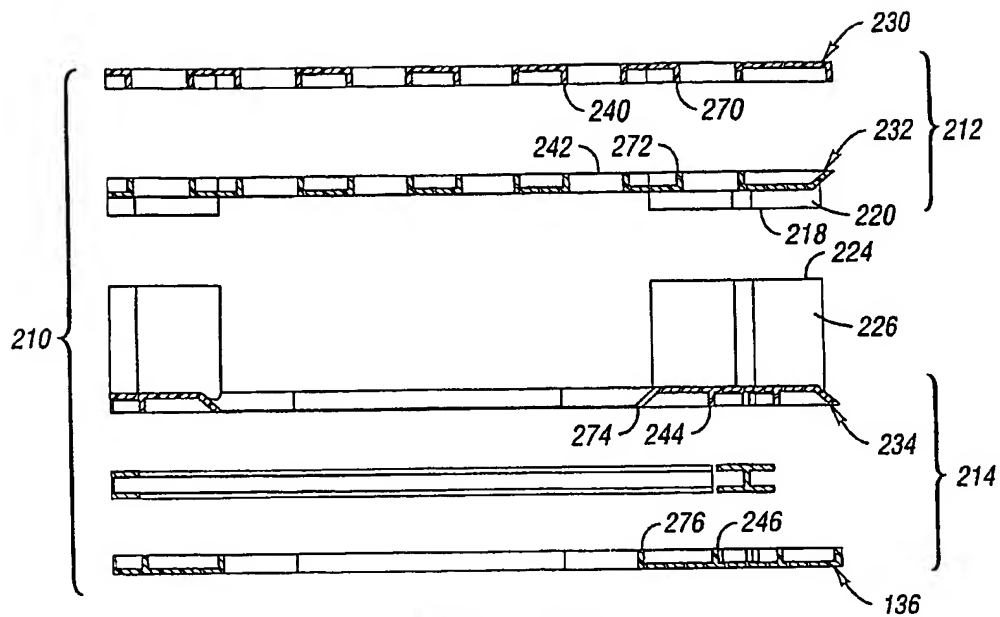


Fig. 31a

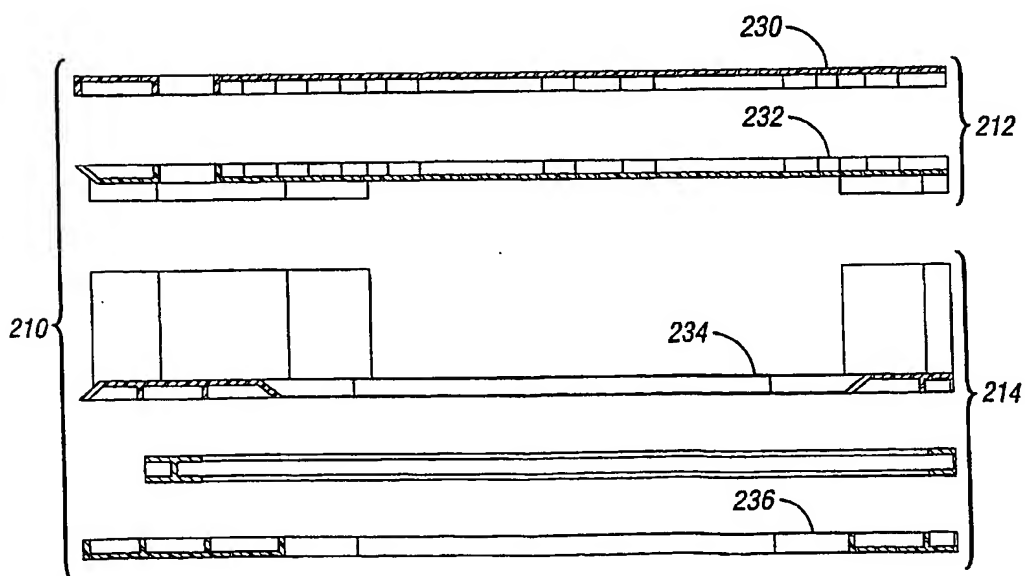
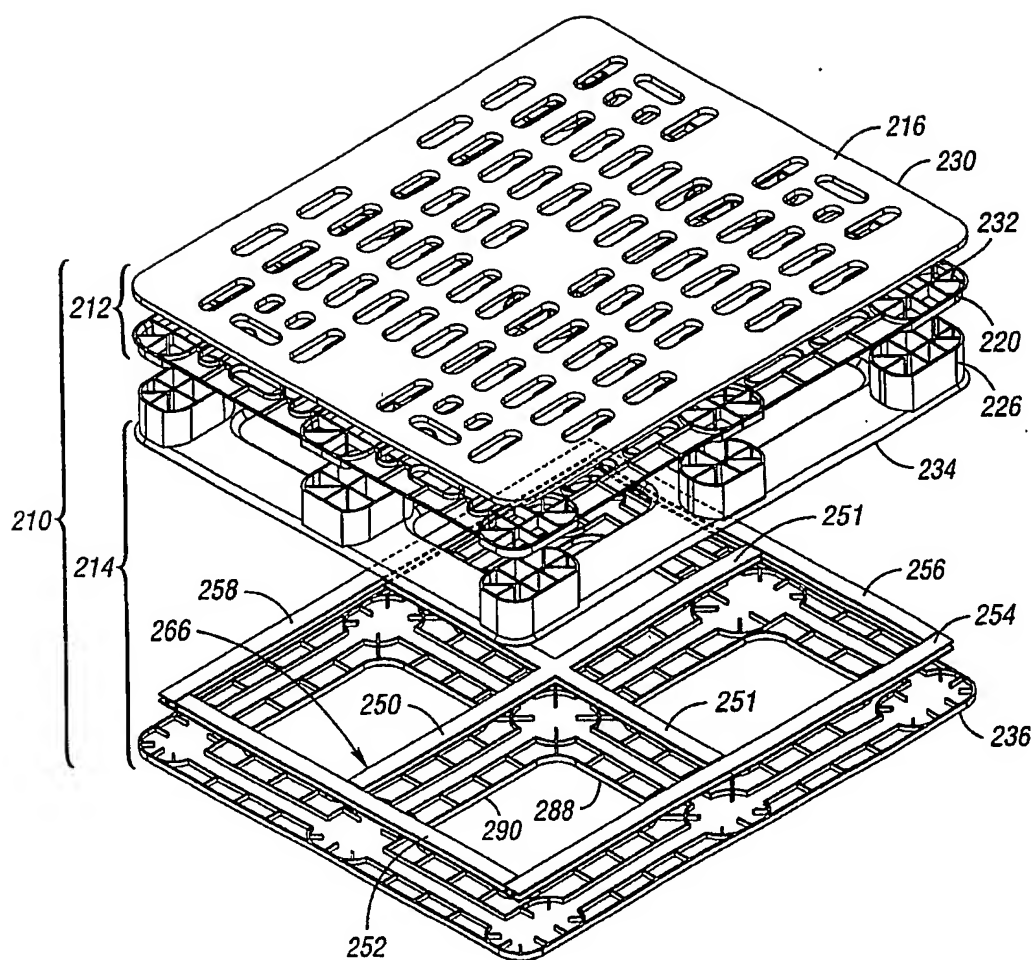
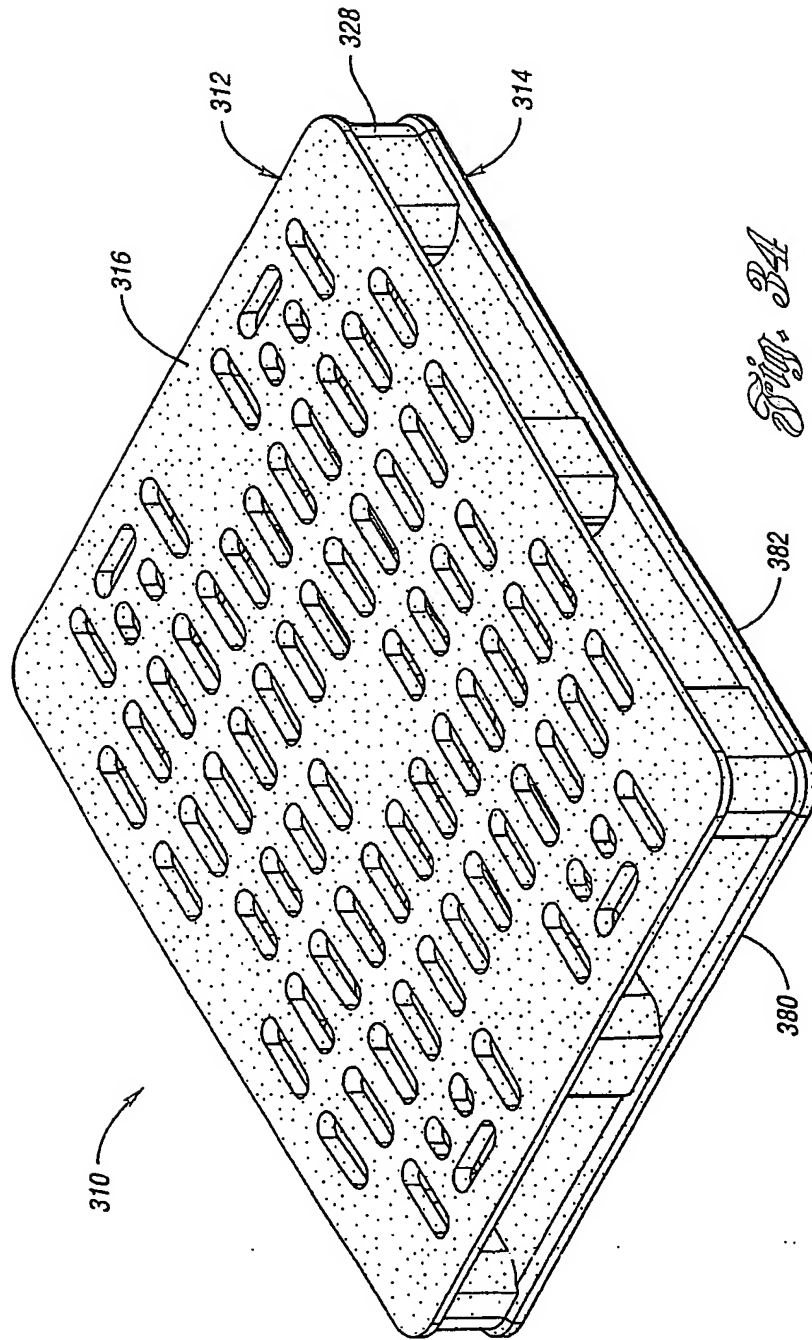


Fig. 32b

21/34

*Fig. 33*

22/34



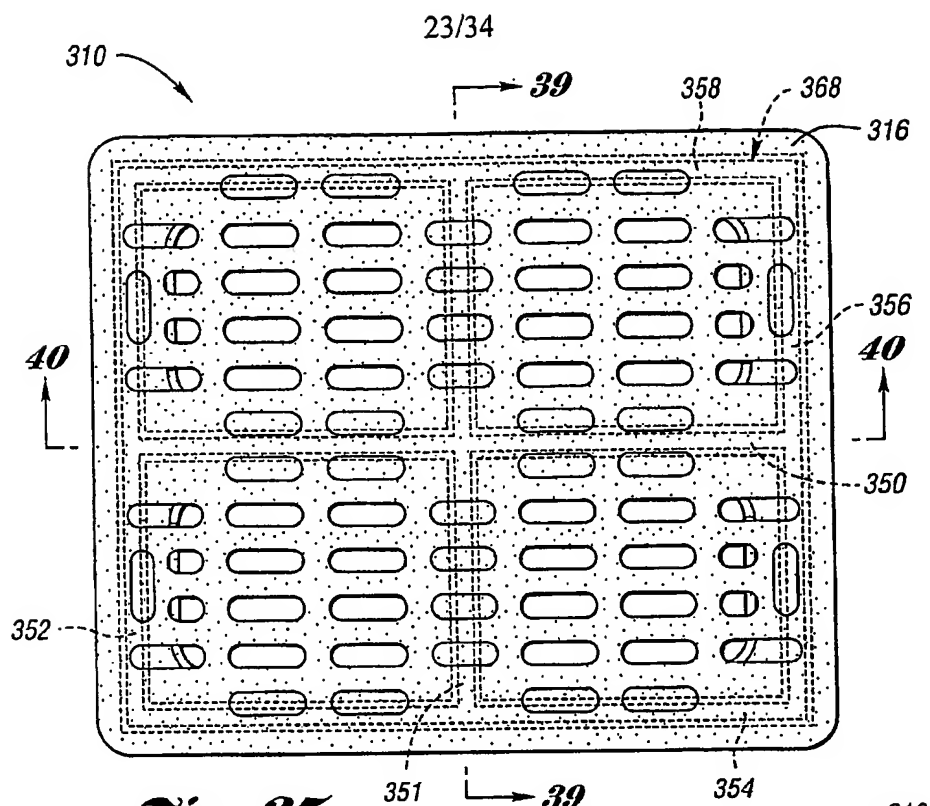


Fig. 35

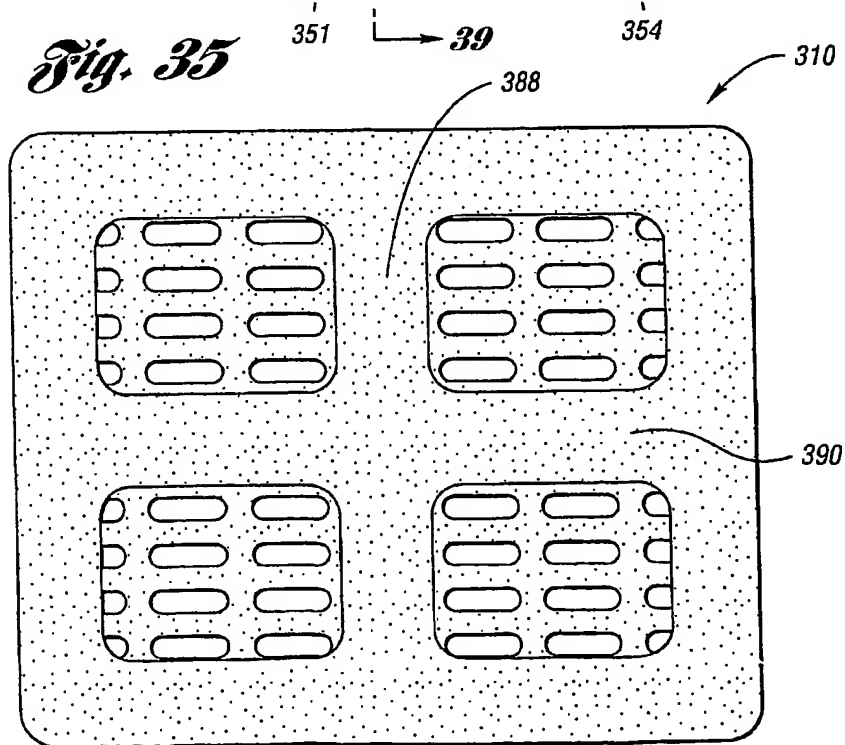


Fig. 36

24/34

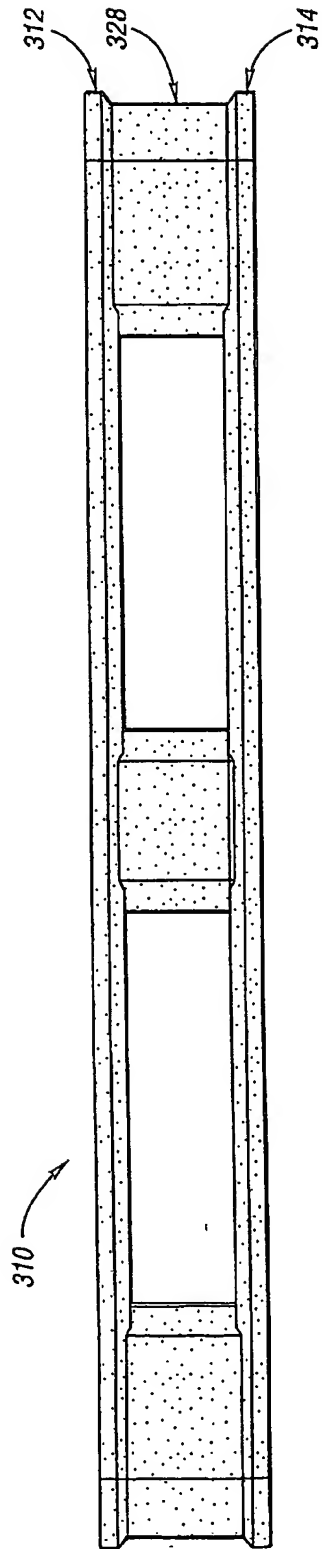


Figure 24

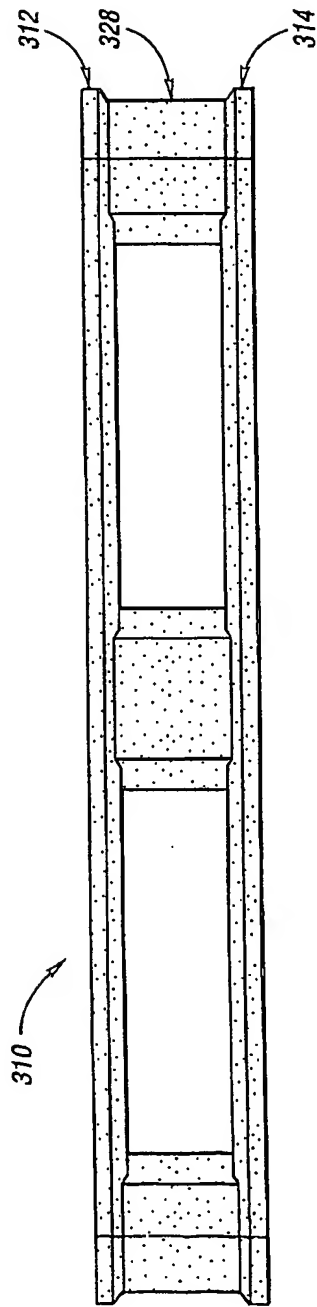


Figure 25

25/34

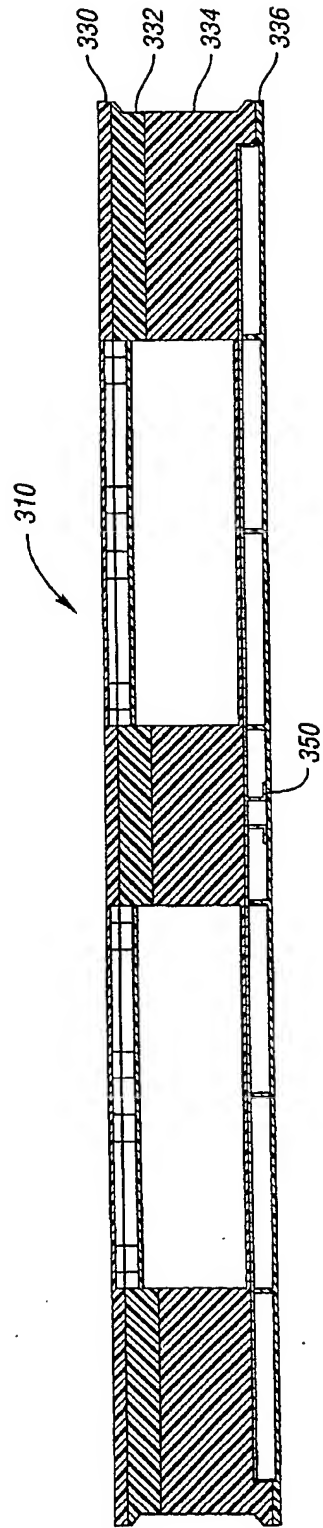


Fig. 39

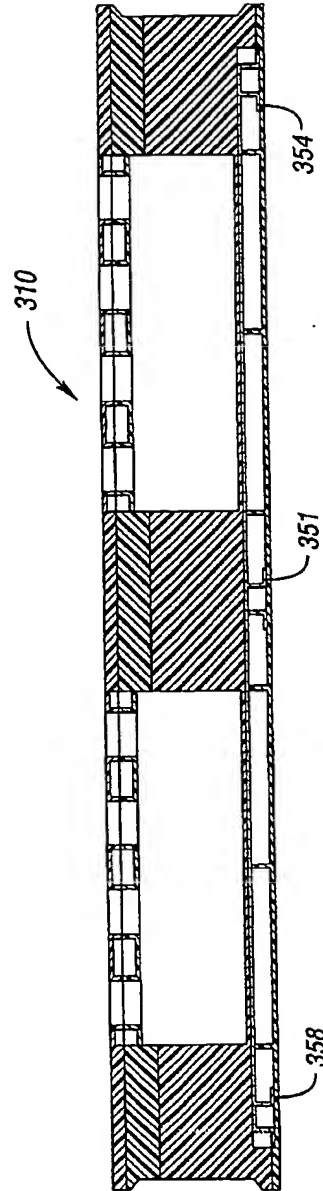


Fig. 40

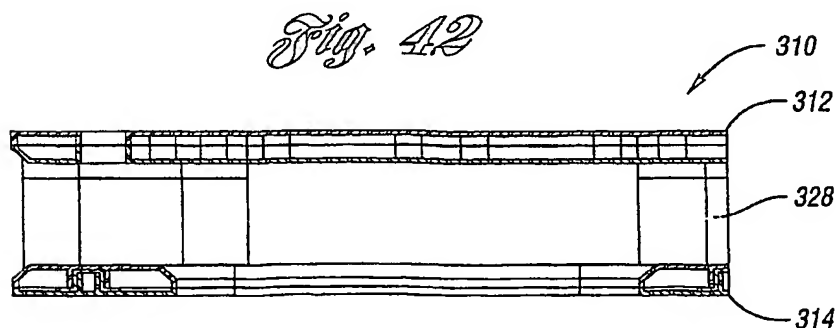
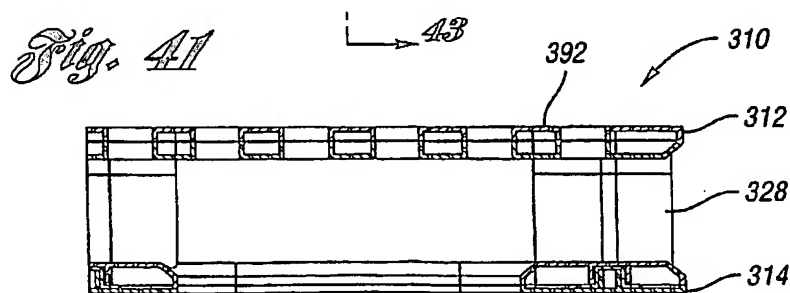
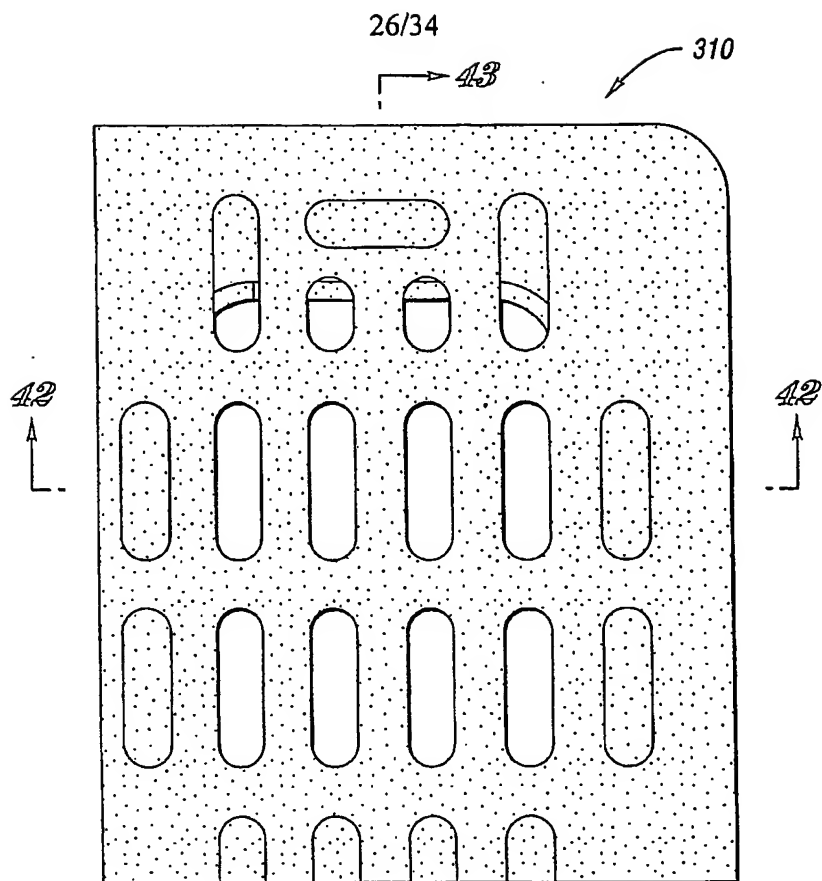


Fig. 43

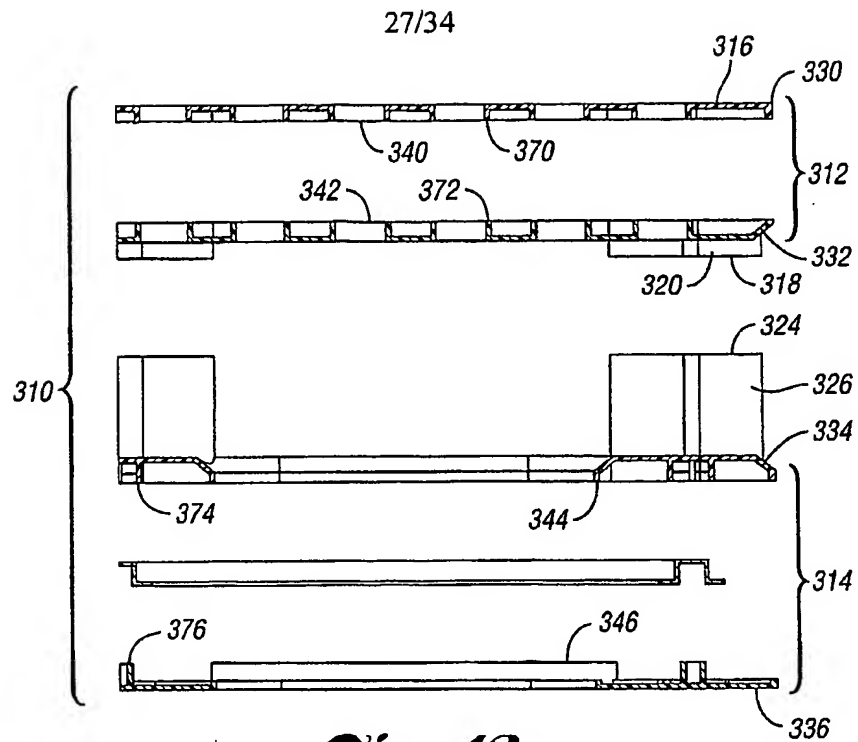


Fig. 42a

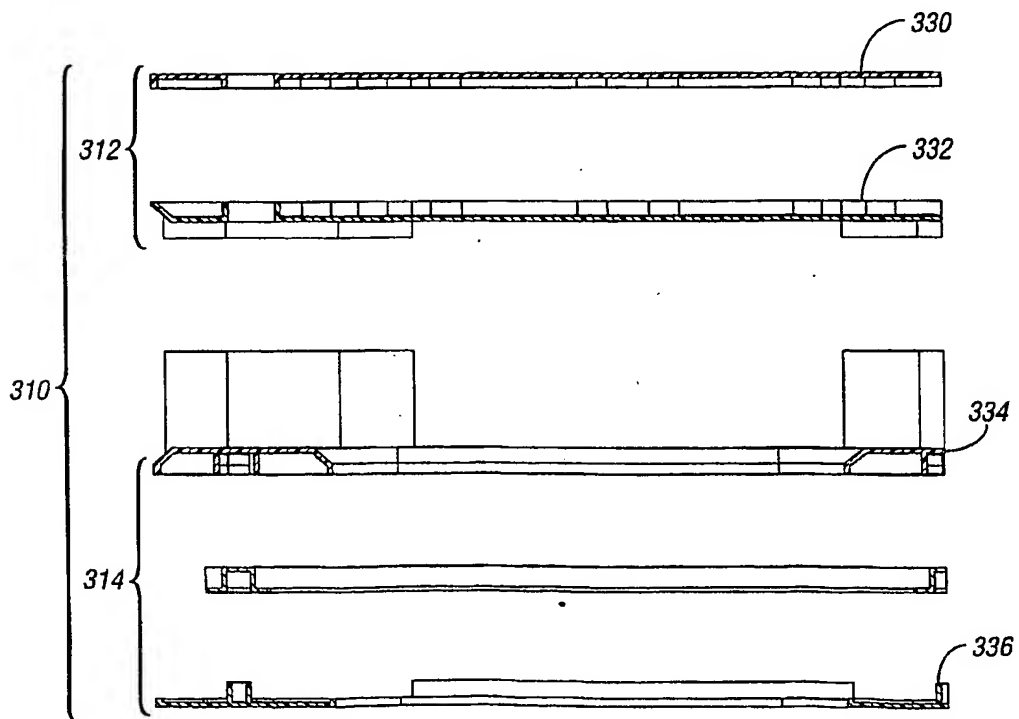
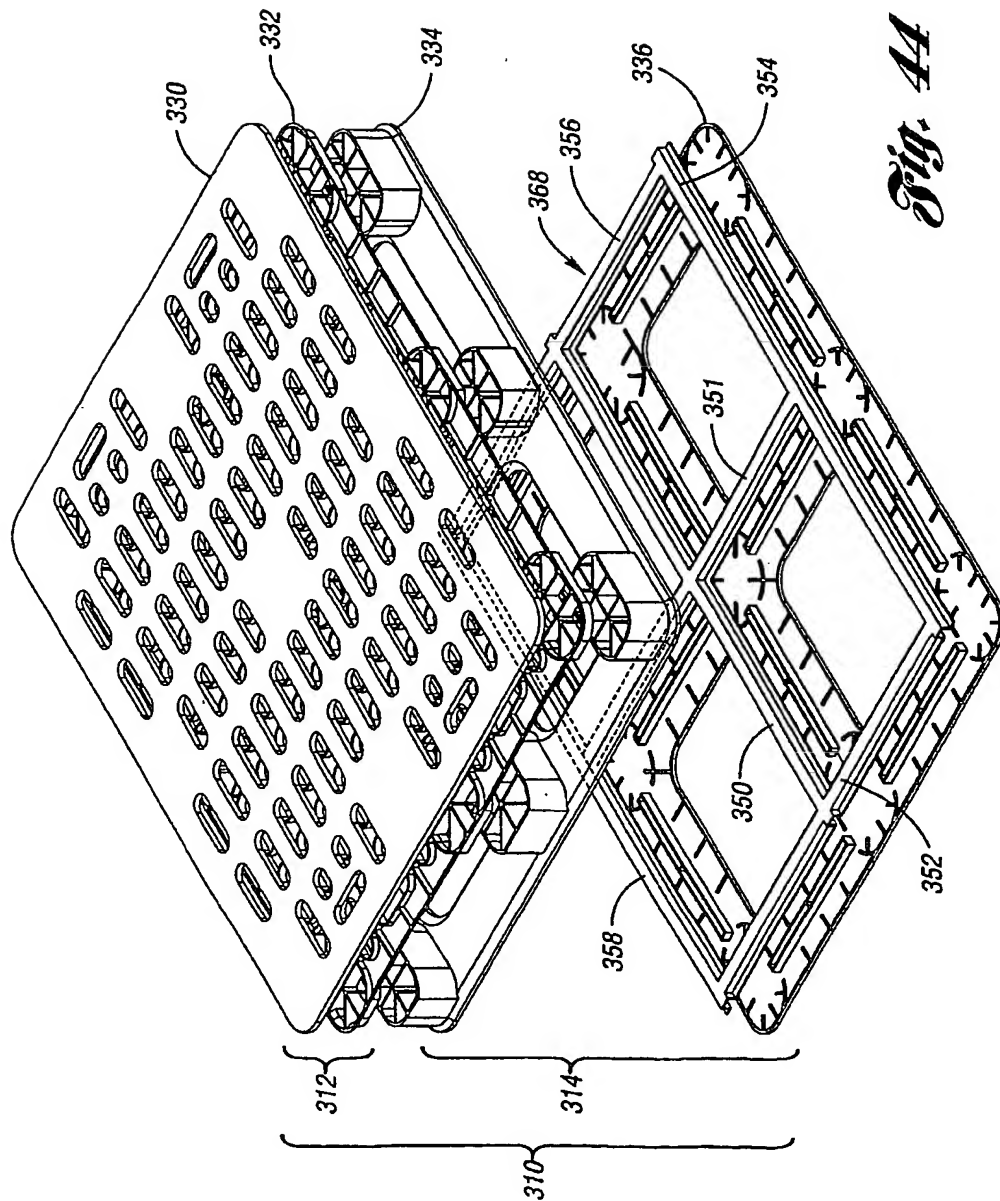


Fig. 43a

28/34




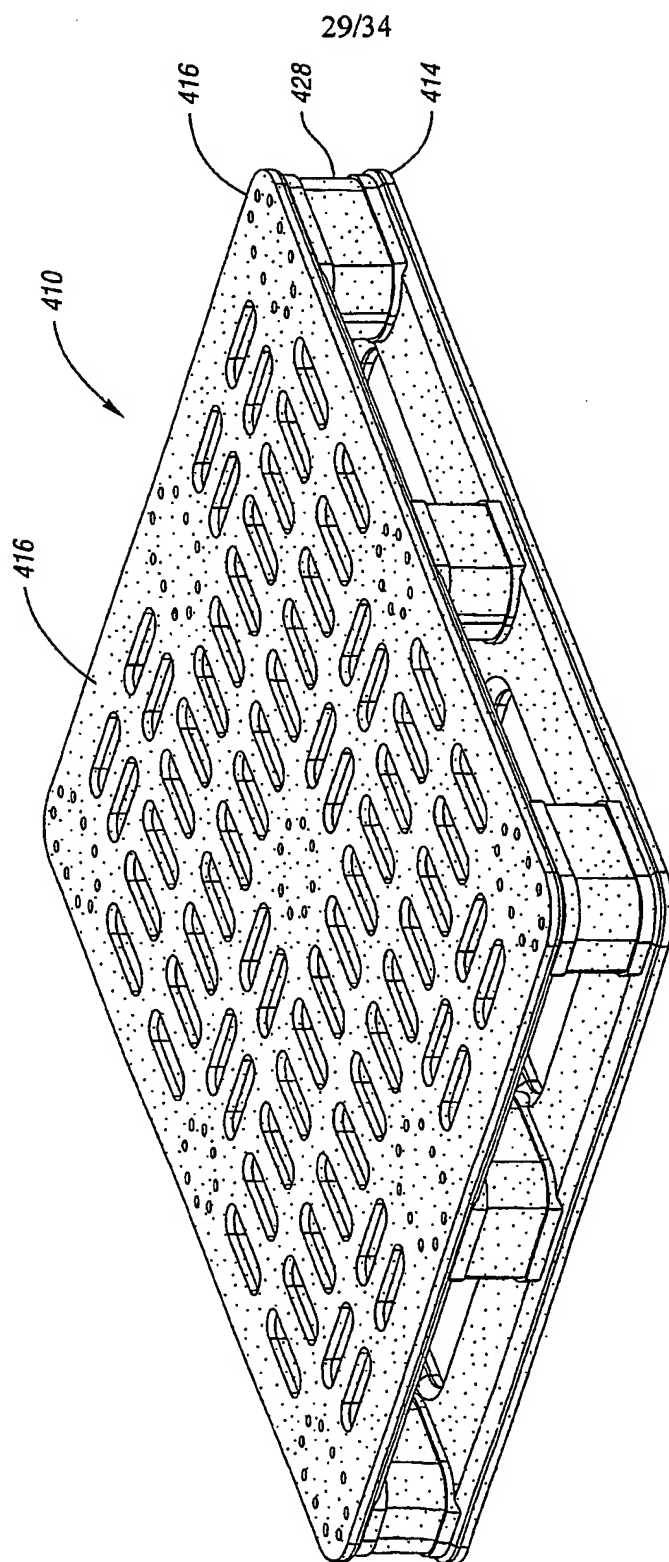


Fig. 45

30/34

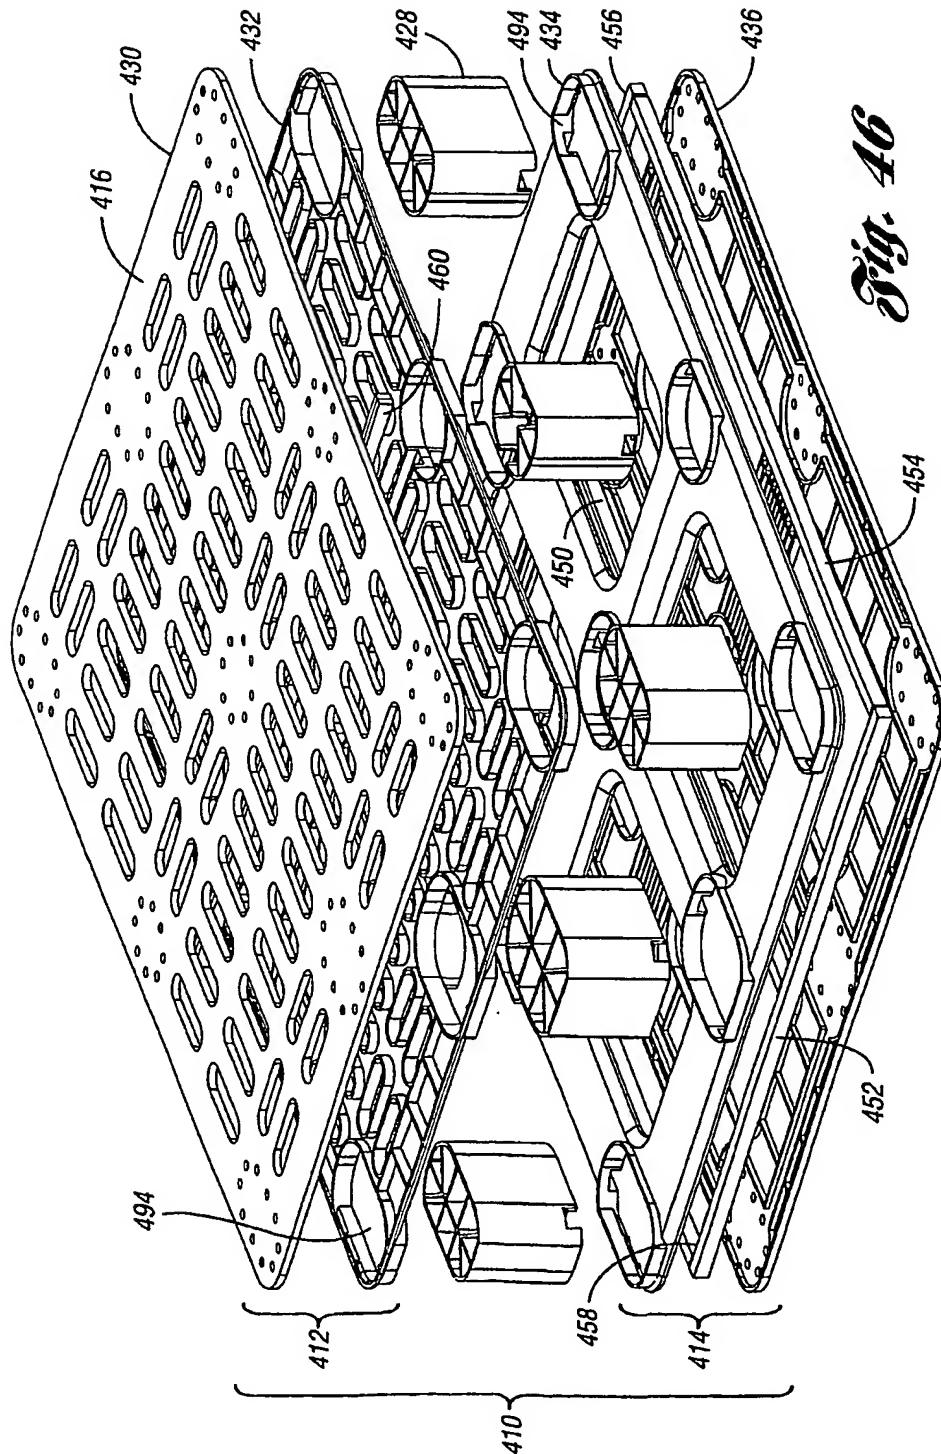

31/34

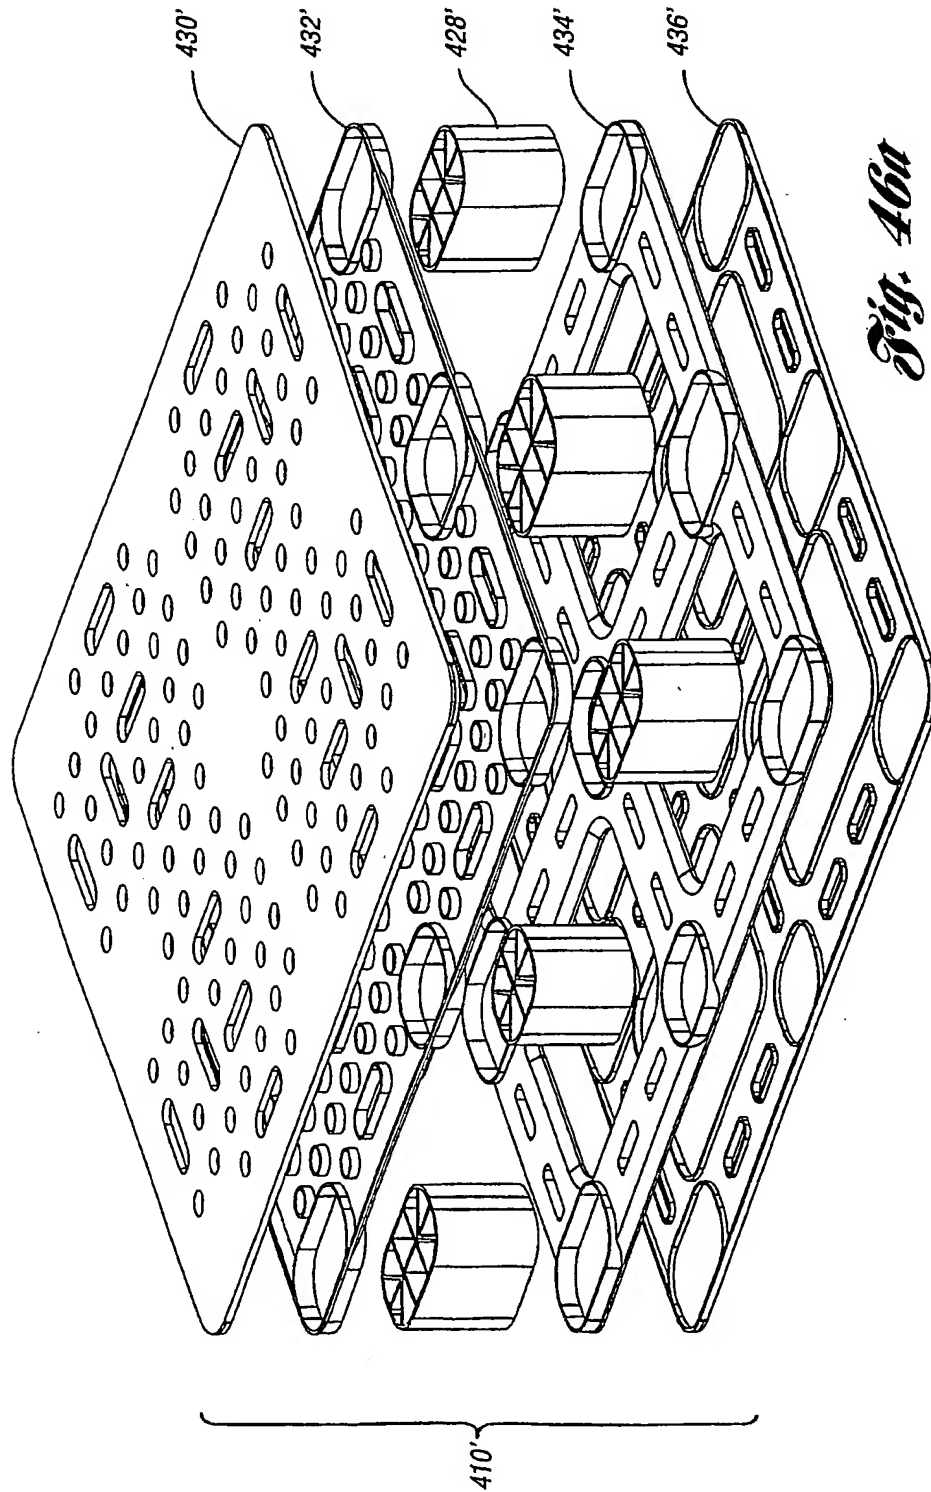


Fig. 46a

32/34

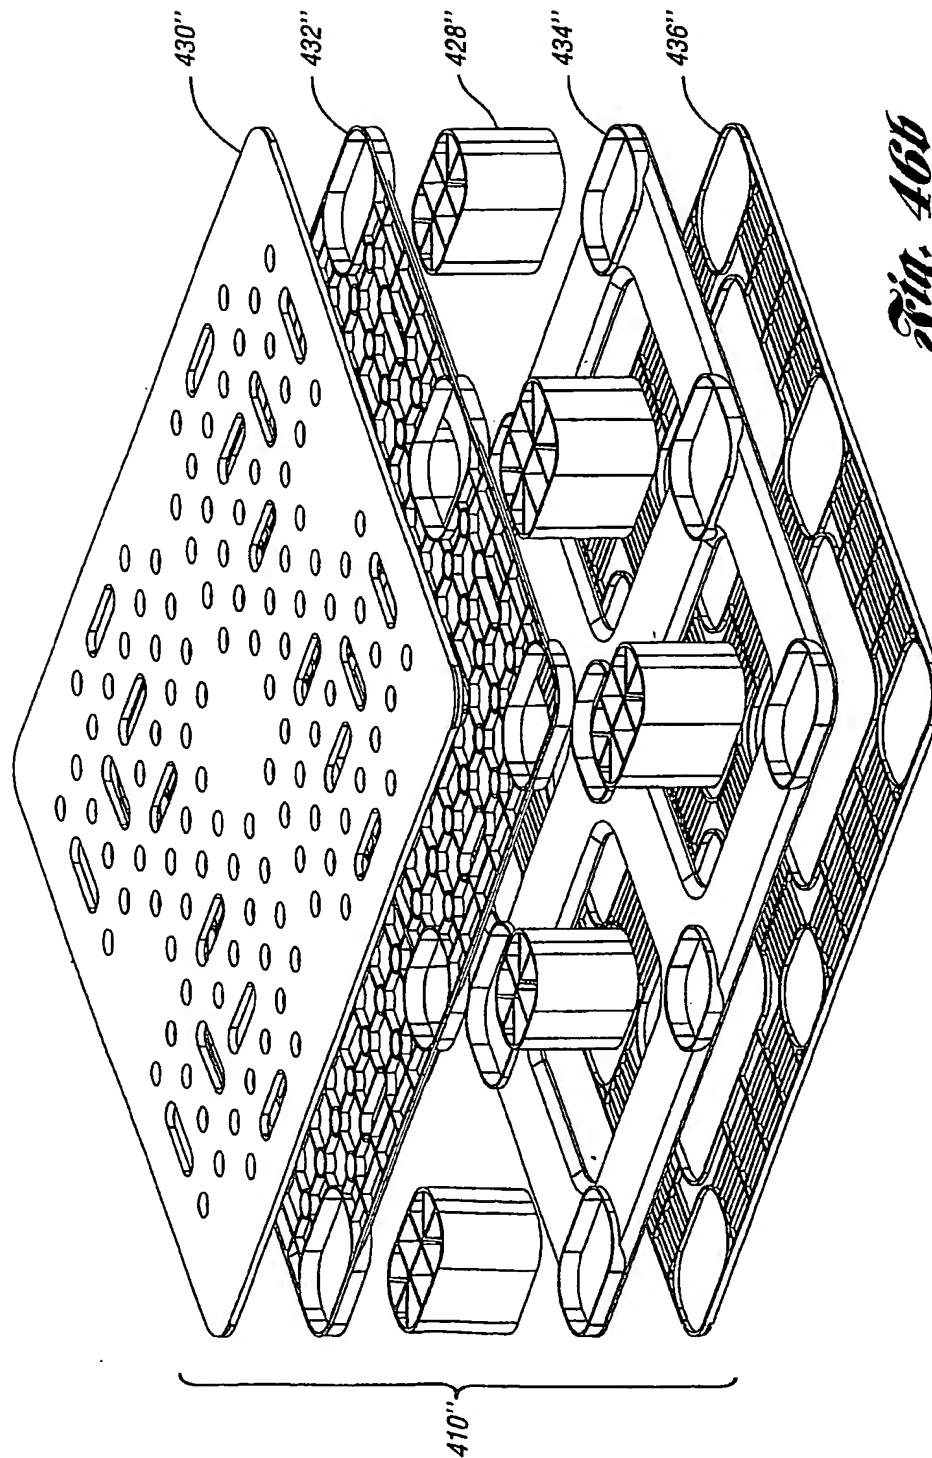


Fig. 46b

33/34

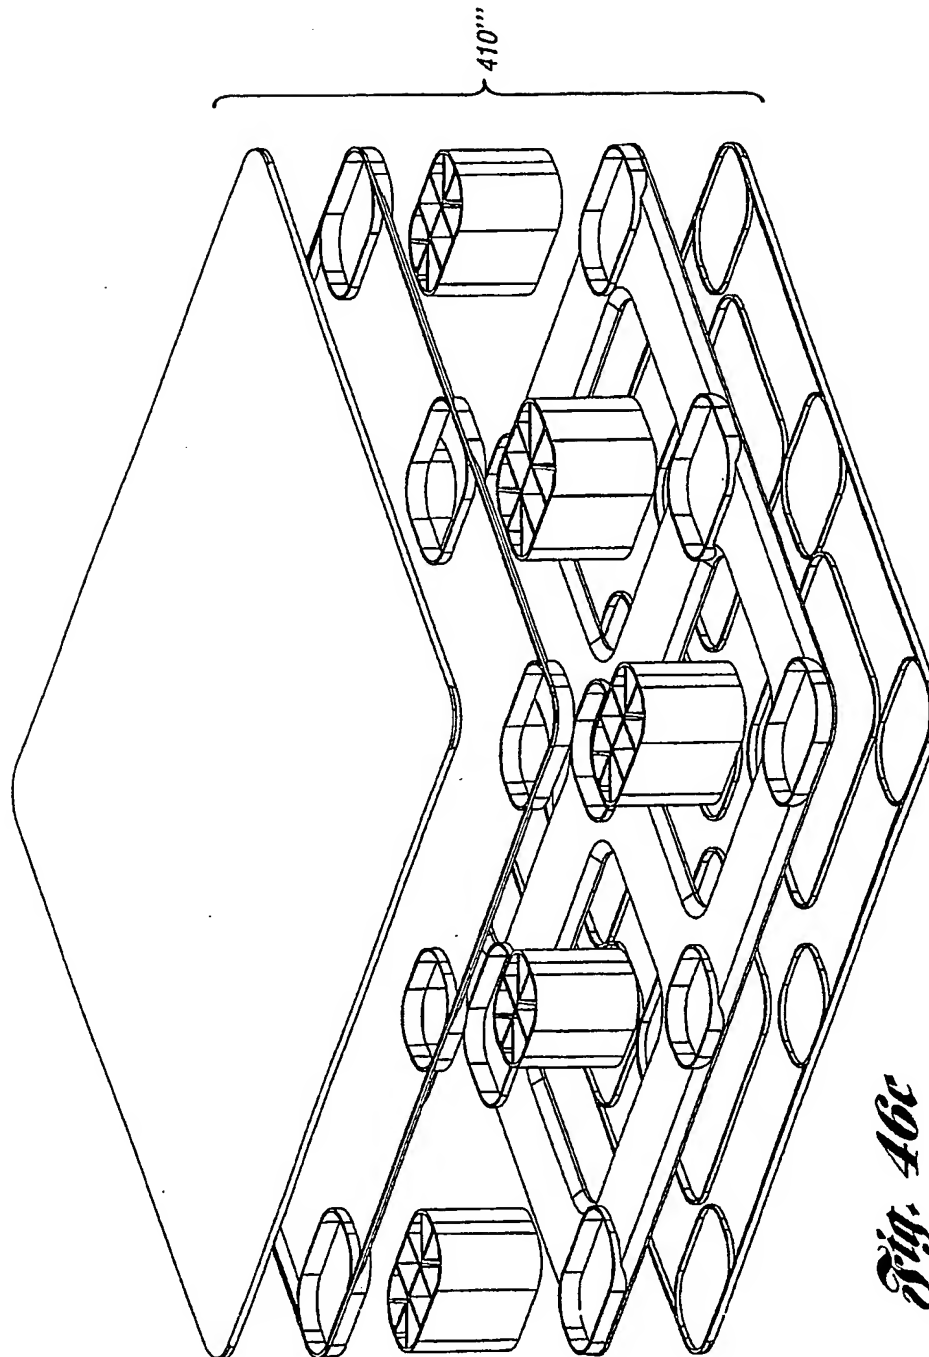


Fig. 46c

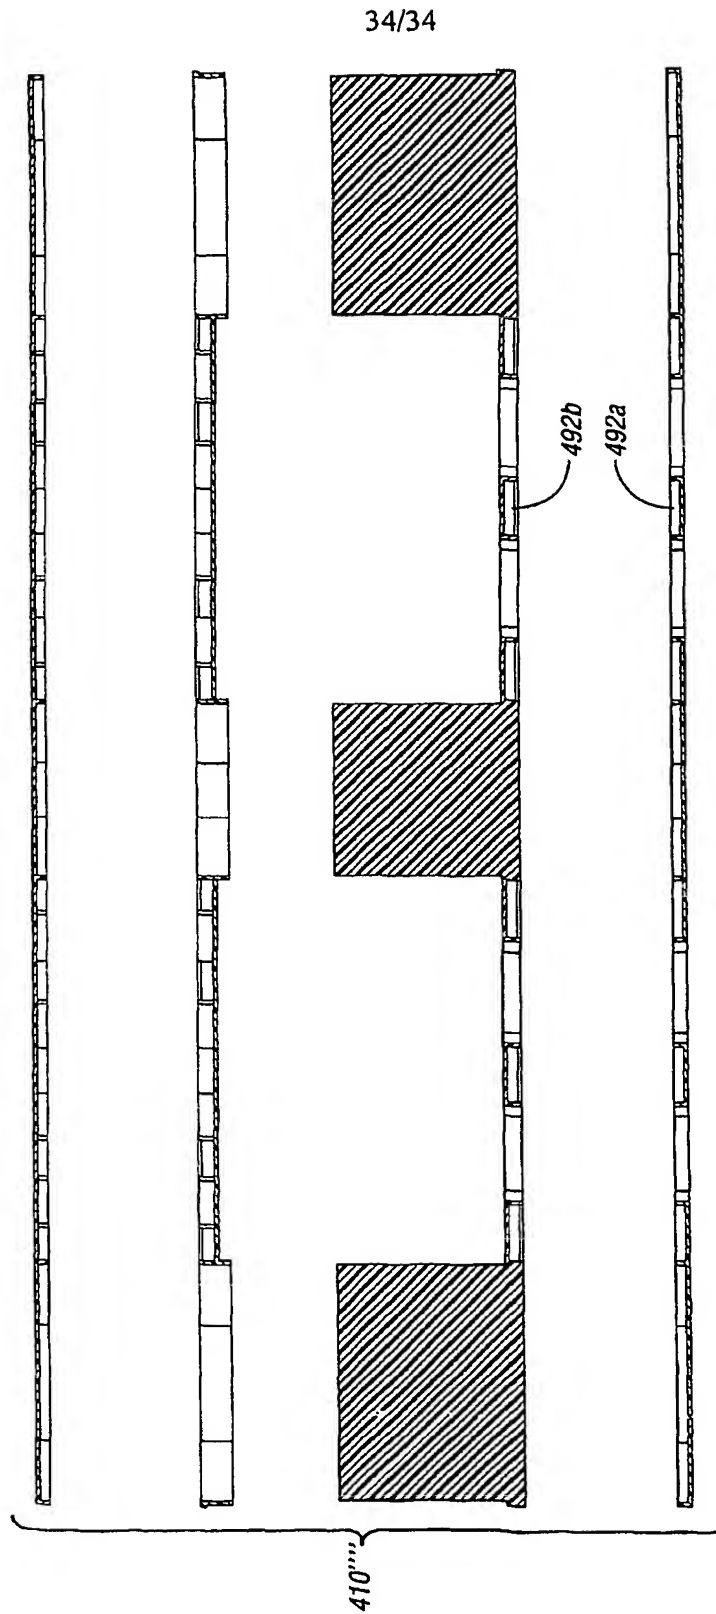


Fig. 47

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B65D19/26 B65D19/32

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B65D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 6 283 044 B1 (APPS WILLIAM P) 4 September 2001 (2001-09-04) column 9, line 11 -column 10, line 4; figures 5,7,12,13	1-3, 7-15, 19-29, 33-42
Y	EP 0 226 505 A (ALLIBERT SA) 24 June 1987 (1987-06-24) column 2, line 57 -column 3, line 4; figure 1 --- -/--	1-3, 7-15, 19-23, 25-29, 33-35, 37-42

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

13 January 2003

Date of mailing of the international search report

21/01/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Lawder, M

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 6 199 488 B1 (FAVARON JAMES ET AL) 13 March 2001 (2001-03-13) figure 6 -----	24, 36

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 02/33334

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6283044	B1	04-09-2001	US 6250234 B1	26-06-2001
			AU 4831799 A	24-01-2000
			BR 9911746 A	03-04-2001
			CA 2336484 A1	13-01-2000
			CN 1314860 T	26-09-2001
			CZ 20004905 A3	17-04-2002
			EP 1115622 A1	18-07-2001
			HU 0102819 A2	28-11-2001
			JP 2002519258 T	02-07-2002
			PL 346761 A1	25-02-2002
			TR 200100627 T2	23-07-2001
			TW 407125 B	01-10-2000
			WO 0001588 A1	13-01-2000
			US 2002011195 A1	31-01-2002
			US 2002134284 A1	26-09-2002
			US 2002043184 A1	18-04-2002
EP 0226505	A	24-06-1987	FR 2590870 A1	05-06-1987
			AT 44268 T	15-07-1989
			CA 1285502 A1	02-07-1991
			DE 3664128 D1	03-08-1989
			EP 0226505 A1	24-06-1987
			US 4735154 A	05-04-1988
US 6199488	B1	13-03-2001	AU 9689298 A	27-04-1999
			CN 1279641 T	10-01-2001
			DE 69806953 D1	05-09-2002
			EP 1021346 A1	26-07-2000
			ES 2177070 T3	01-12-2002
			WO 9917998 A1	15-04-1999

THIS PAGE BLANK (USPTO)